

Shipping dimensions in cub.yd


BPR 25/40	0.503
BPR 25/40 D	0.563

Standard Equipment

- ☒ Protective engine covering
- ☒ Single lever control
- ☒ Low vibration steering rod
- ☒ Height adjustable steering rod
- ☒ Steering rod lockable in transport and working position
- ☒ Vibration and throttle regulation on the steering rod
- ☒ Highly wear resistant base plate
- ☒ Fully protected V-belt
- ☒ Recoil starter
- ☒ Back-up drive protection
- ☒ Automatic shutdown at low oil level
- ☒ 3-2-1 Warranty

Optional Equipment

- ☐ Sprinkler system (+28.7lb)
- ☐ Tool kit
- ☐ Special painting
- ☐ Plastic mat
- ☐ Transport wheels, puncture-proof (+8.8lb)
- ☐ Service Kit
- ☐ US Version EPA 4 NRTC (BPR25/40D)
- ☐ TOUGH WARRANTY

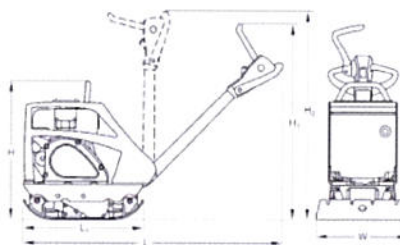

Dimensions in in

	H	H1	H2	L	L1	W
BPR 25/40	26.0	34.3	48.0	57.5	25.6	15.7
BPR 25/40 D	29.1	34.3	48.0	57.5	25.6	15.7

Technical Data

		BOMAG BPR 25/40	BOMAG BPR 25/40 D
Weights			
Operating weight CECE (W)	lb	298	331
Basic weight	lb	291	324
Dimensions			
Basic working width	in	15.7	15.7
Lowest passing height	in	26.0	29.1
Min. height w. steering in top position	in	34.3	34.3
Max. height w. steering in top position	in	47.2	47.2
Driving Characteristics			
Working speed, max.	ft/min	82.0	82.0
Max. gradeability (dep. on soil con.)	%	30	30
Drive			
Engine manufacturer		Honda	Hatz
Type		GX 160	1B20
Emission stage		CARB Phase III	non EPA
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	hp	4.8	4.2
Speed	min-1	3,600	3,000
Drive system		mech.	mech.
Fuel		gasoline	diesel
Fuel comsump. aver. during operation	gal/h	0.3	0.2
Exciter system			
Frequency	vpm	5,100	5,100
Centrifugal force	lb	5,620	5,620
Amplitude	in	0.061	0.061
Capacities			
Fuel	gal	0.8	0.8
Water	gal	3.2	3.2

Technical modifications reserved. Machines may be shown with options.



PRUS 692 65 010

190916 Sa

BOMAG Americas, Inc.
125 Blue Granite Parkway
Ridgeway, SC 29130
USA
Tel. +1 803 3370700
Fax +1 803 3370800
www.bomag.com/us

