


BB35 Series

List	Specifications & Capacities		
Model Numbers	BB3578	BB3584	BB3596
Working width	78"	84"	96"
Capacity	30 cu. ft.	32 cu. ft.	37 cu. ft.
Weight	820 lbs.	853 lbs.	931 lbs.
Number of shanks	7	7	8
Shank material	3/4" x 2 9/16" x 18" heat treated spring steel		
Vertical shank positions	4- positions (2" above, even, 2" below & 4" below scraper end plates)		
Shank tip construction	Replaceable heat treated dimpled-on tips		
Shank beam	4" x 4" x 3/8" Square Tubing with 1/2" x 1/2" reinforced shank opening		
Lift mechanism	Manual with bent pin and hairpin cotter at each shank.		
Moldboard	Formed moldboard - 23" High		
Side Panels	3/8" thick x 23" high x 36" deep		
Depth of bucket	22"		
Bucket reinforcement	Two braces extending from shank beam to rear of bucket, two horizontal gussets between the side panels and moldboard, and two vertical gussets between shank beam and side panels.		
Cutting blades	2 ea. 1/2" x 6" high carbon, heat treated cutting edges; reversible and replaceable. Backfill blade is standard		
Horsepower Requirement	45-120 HP		
A-frame hitch construction	1/2" HR A-frame plates		
3-Point hitch type	Cat. I & Cat.II Double strap lower clevises Fits Land Pride Quick Hitch		

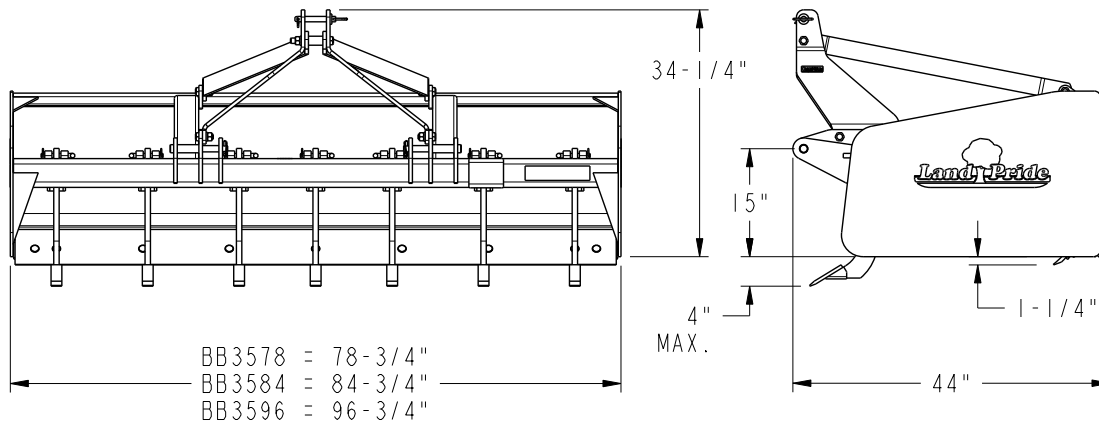

39259