



Magswitch Technology, Inc.
8774 Yates Dr. Suite 140
Westminster, CO 80031
Magswitch.com.au
303-468-0662

Magswitch Mag-Utility Hook 25

P/N: 8100012

The Magswitch Mag-Utility Hook is the perfect “helping hand.” Magswitch Mag-Utility Hooks let you hang tools, lights, support wires, air hoses, ground lines and more, right where you need them, quickly and easily. Ideal for keeping hoses and lines off the floor for a safer work environment. Mag-Utility Hooks are convenient and easily move from job to job.




WARNING!
Do Not Operate Unless In
Contact With Ferrous Target

SPECIFICATIONS

P/N: 8100012 - MAGSWITCH Mag-Utility Hook 25

Magnet Maximum Breakaway*	120 lbs / 52.5 kg
Usable Max Breakaway*	25 lbs/11 kg
Full Saturation Thickness	11g / 3.05mm
2:1 Shear Working Load*	20 lbs / 9 kg
Net Weight	0.4 lbs/0.2 kg
Overall Height	89 mm
Magnetic Pole Footprint	40mm Diameter

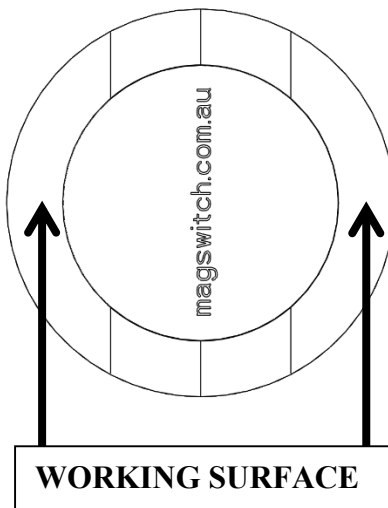


* Max Breakaway determined in laboratory environment on 2" thick SAE1018 Steel with surface roughness 63 micro inches. Many factors contribute to the actual breakaway force in each application. Always test the magswitch in each application before deployment. Refer to the magswitch information booklet for more information.




Part Number 110692
Revision Date: June 26, 2012

Magswitch Mag-Utility Hook 25 Breakaway Data vs. Thickness

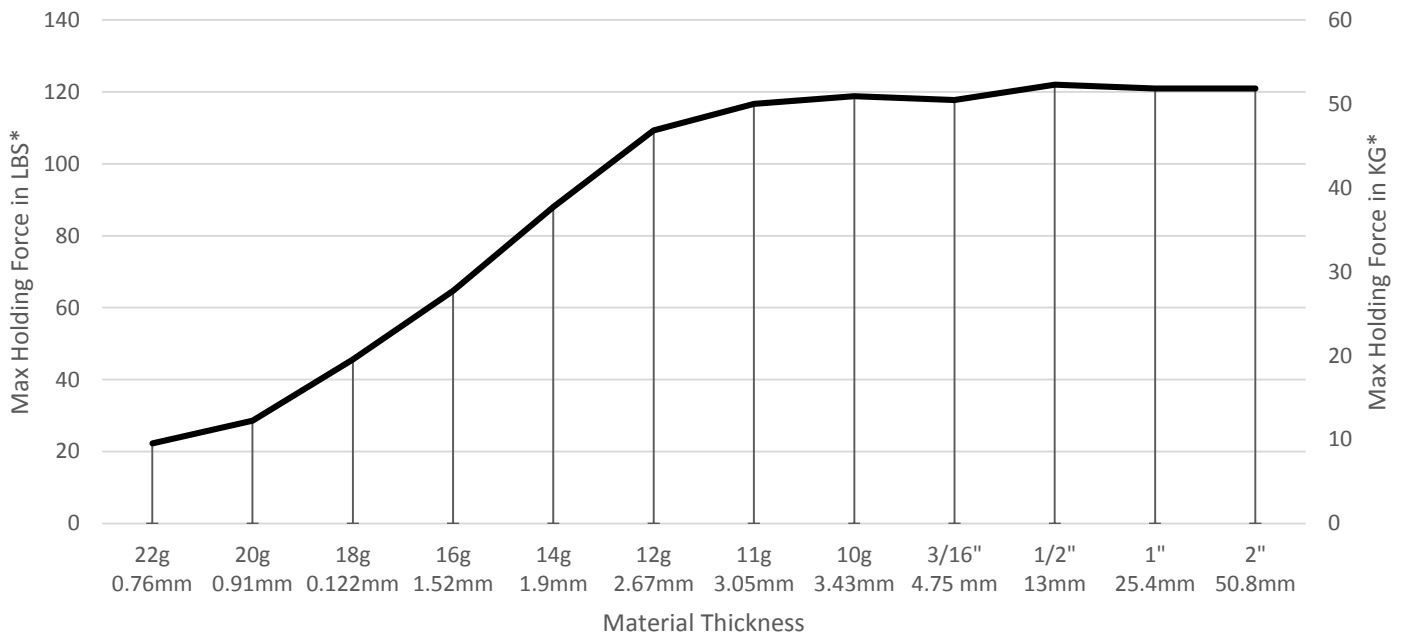

Magswitch Mag-Utility Hook 25 Shear vs. Thickness

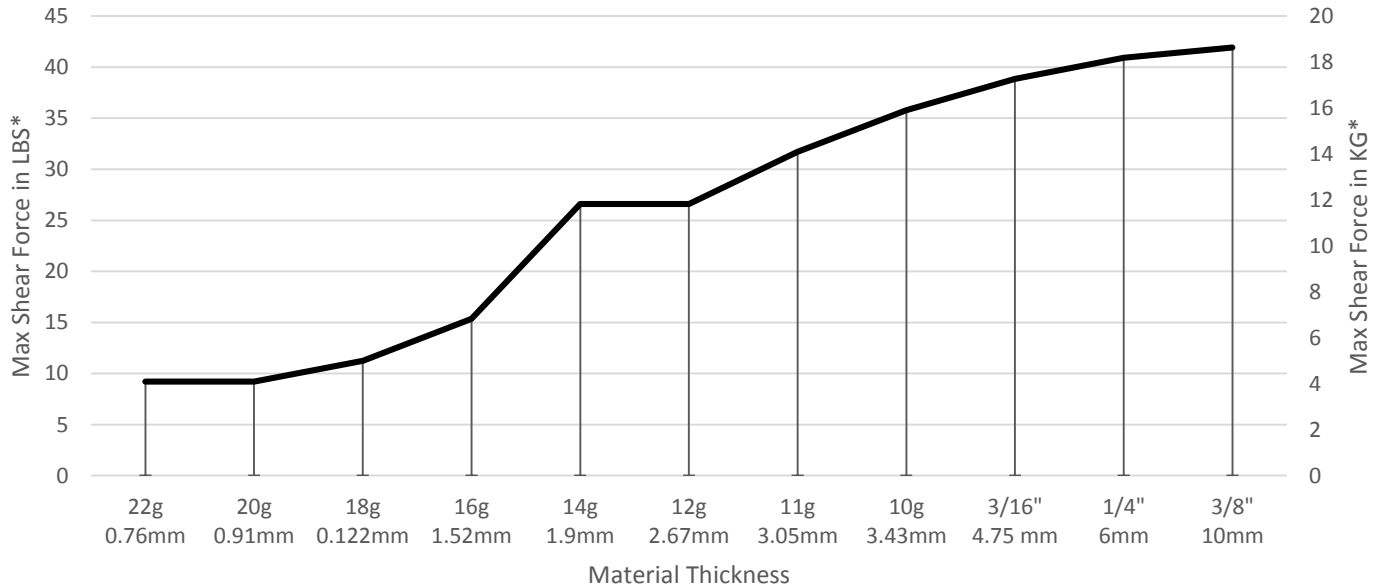

Part Number 110692
Revision Date: June 26, 2012

* Max Breakaway determined in laboratory environment on 2" thick SAE1018 Steel with surface roughness 63 micro inches. Many factors contribute to the actual breakaway force in each application. Always test the magswitch in each application before deployment. Refer to the magswitch information booklet for more information.