



Reinforced Concrete Core Bits



C-51 PRO Double Pointed Wet Bits

14" Drilling Depth

Faster drilling – The double-pointed segments provide incredibly fast drilling speeds. Fast seating and reduced vibration – The double-pointed tips penetrate quickly, and hold a straight drilling path to reduce side drag. Reduced vibration improves drilling efficiency and bit life.

Improved cooling and slurry removal – The double-pointed segments increases water flow to reduce heat and remove slurry more efficiently. Specially formulated segments – Pro V bits contain high concentrations of quality diamonds combined with a special blend of metal powders to deliver maximum performance with lowest drilling costs.

TECH SPECS

- Wet Only Use
- 3/8" - 1-3/4" are crown segments
- 3/8" - 6" are laser welded
- 16" and above standard with spoke back
- 3/8" are 5/8"-11 thread
- Remainder are 1-1/4"-7 thread



Diameter	P/N	Diameter	P/N	Diameter	P/N
3/8"	D36225	2-1/4"	D36102	7"	D36118
1/2"	D36226	2-1/2"	D36103	8"	D36119
5/8"	D36227	2-3/4"	D36104	8-1/2"	D36210
3/4"	D36228	3"	D36105	9"	D36120
7/8"	D36229	3-1/4"	D36106	10"	D36121
1"	D36230	3-1/2"	D36107	11"	D36176
1-1/8"	D36231	4"	D36108	12"	D36122
1-1/4"	D36232	4-1/4"	D36109	13"	D36132
1-3/8"	D36233	4-1/2"	D36110	14"	D36123
1-1/2"	D36234	5"	D36112	16"	D36124
1-5/8"	D36235	5-1/2"	D36113	18"	D36125
1-3/4"	D36236	6"	D36115	20"	D36126
1-7/8"		6-1/4"	D36116	24"	D36136
2"	D36101	6-1/2"	D36117	26"	D36163





Reinforced Concrete Core Bits



C-52 PRO Double Pointed Wet Bits

14" Drilling Depth

Faster drilling – The double-pointed segments provide incredibly fast drilling speeds. Fast seating and reduced vibration – The double-pointed tips penetrate quickly, and hold a straight drilling path to reduce side drag. Reduced vibration improves drilling efficiency and bit life.

Improved cooling and slurry removal – The double-pointed segments increases water flow to reduce heat and remove slurry more efficiently. Specially formulated segments – Pro V bits contain high concentrations of quality diamonds combined with a special blend of metal powders to deliver maximum performance with lowest drilling costs.

TECH SPECS


- Wet Only Use
- 1" - 1-3/4" are crown segments
- 1" - 6" are laser welded
- 16" and above standard with spoke back
- 1" - 1-1/2" are 5/8"-11 thread
- Remainder are 1-1/4"-7 thread



Double Pointed Segments



WET ONLY

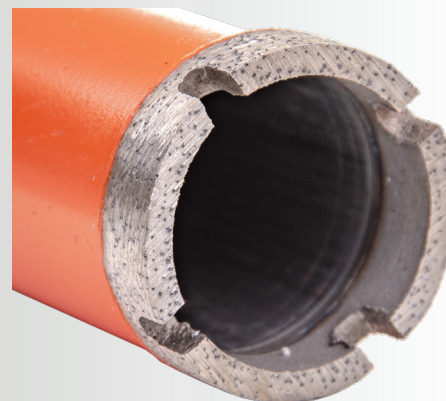

Diameter	P/N	Diameter	P/N	Diameter	P/N
1"	D32321	3 1/2"	D32207	10"	D32221
1-1/8"	D32322	4"	D32208	11"	D32230
1-1/4"	D32323	4-1/4"	D32209	12"	D32222
1-3/8"	D32324	4 1/2"	D32210	13"	D32240
1-1/2"	D32325	5"	D32212	14"	D32223
1-5/8"	D32326	5 1/2"	D32213	16"	D32232
1-3/4"	D32327	6"	D32215	18"	D32233
1-7/8"	D32328	6-1/4"	D32216	20"	D32234
2"	D32201	6 1/2"	D32217	24"	D32235
2-1/4"	D32202	7"	D32218	26"	D32231
2 1/2"	D32203	7-1/2"	D32291	30"	D32238
2-3/4"	D32204	8"	D32219	33"	D33417
3"	D32205	8-1/2"	D32292		
3-1/4"	D32285	9"	D32220		



09/19/2022