


# Grading Scrapers

GS0548 & GS0560

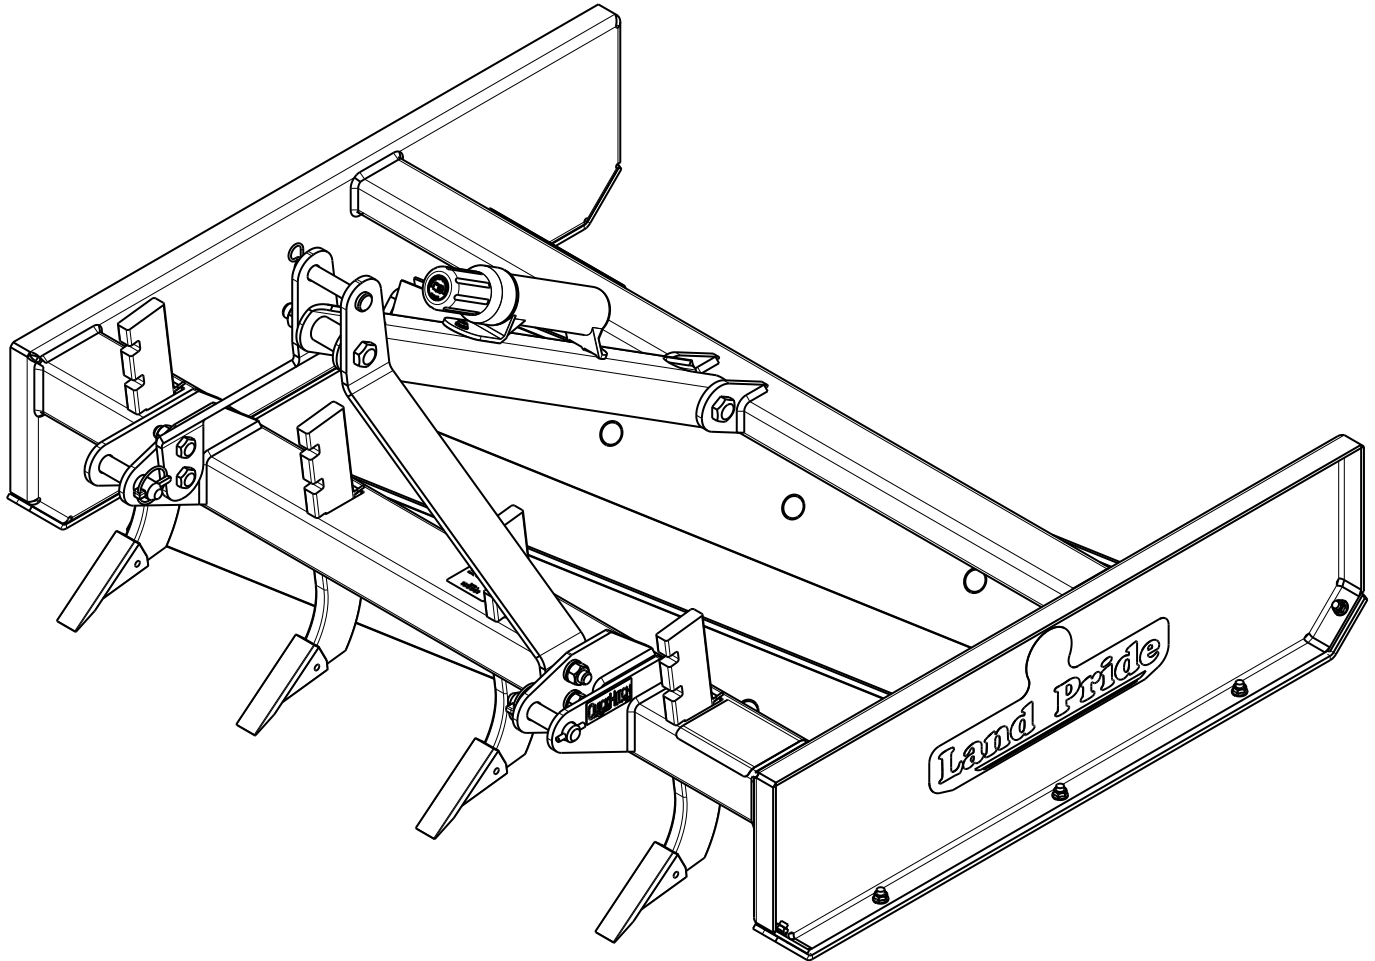

39850

## 303-474M Operator's Manual



Read the Operator's Manual entirely. When you see this symbol, the subsequent instructions and warnings are serious - follow without exception. Your life and the lives of others depend on it!

*Cover photo may show optional equipment not supplied with standard unit.*

*For an Operator's Manual and Decal Kit in French or Spanish Language, please see your Land Pride dealer.*



## Machine Identification

Record your machine details in the log below. If you replace this manual, be sure to transfer this information to the new manual.

If you, or the dealer, have added Options not originally ordered with the machine, or removed Options that were originally ordered, the weights and measurements are no longer accurate for your machine. Update the record by adding the machine weight and measurements provided in the Specifications & Capacities Section of this manual with the Option(s) weight and measurements.

|                        |                       |
|------------------------|-----------------------|
| <b>Model Number</b>    |                       |
| <b>Serial Number</b>   |                       |
| <b>Machine Height</b>  |                       |
| <b>Machine Length</b>  |                       |
| <b>Machine Width</b>   |                       |
| <b>Machine Weight</b>  |                       |
| <b>Delivery Date</b>   |                       |
| <b>First Operation</b> |                       |
| <b>Accessories</b>     | <br><hr/> <hr/> <hr/> |

## Dealer Contact Information

**Name:** \_\_\_\_\_

**Street:** \_\_\_\_\_

**City/State:** \_\_\_\_\_

**Telephone:** \_\_\_\_\_

**Email:** \_\_\_\_\_

|                                                                                     |                                                                                                                                                |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>California Proposition 65</b><br>WARNING: Cancer and reproductive harm - <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|

|                                                   |           |
|---------------------------------------------------|-----------|
| <b>Important Safety Information</b>               | <b>1</b>  |
| Safety at All Times                               | 1         |
| Look For The Safety Alert Symbol                  | 1         |
| Safety Labels                                     | 4         |
| <b>Introduction</b>                               | <b>5</b>  |
| Application                                       | 5         |
| Using This Manual                                 | 5         |
| Terminology                                       | 5         |
| Definitions                                       | 5         |
| Owner Assistance                                  | 5         |
| Serial Number                                     | 5         |
| Further Assistance                                | 5         |
| <b>Section 1: Assembly &amp; Set-up</b>           | <b>6</b>  |
| Tractor Requirements                              | 6         |
| Torque Requirements                               | 6         |
| Before You Start                                  | 6         |
| Tractor Shutdown Procedure                        | 6         |
| Hitch & Shank Assembly                            | 7         |
| 3-Point Hook-up                                   | 8         |
| <b>Section 2: Adjustments</b>                     | <b>9</b>  |
| Level Scraper                                     | 9         |
| Shank Depth Adjustment                            | 9         |
| <b>Section 3: Operating Instructions</b>          | <b>10</b> |
| Operating Checklist                               | 10        |
| Safety Information                                | 10        |
| Transporting                                      | 11        |
| General Operating Instructions                    | 11        |
| <b>Section 4: Accessories</b>                     | <b>12</b> |
| Rear Mounted Grader Blades                        | 12        |
| <b>Section 5: Maintenance</b>                     | <b>13</b> |
| Maintenance                                       | 13        |
| Grader Blades                                     | 13        |
| Shank Tips                                        | 13        |
| Skid Shoes                                        | 14        |
| Long-Term Storage                                 | 14        |
| Ordering Replacement Parts                        | 14        |
| <b>Section 6: Specifications &amp; Capacities</b> | <b>15</b> |
| <b>Section 7: Features &amp; Benefits</b>         | <b>16</b> |
| <b>Section 8: Torque Values Chart</b>             | <b>17</b> |
| <b>Section 9: Warranty</b>                        | <b>19</b> |



© Copyright 2020 All rights Reserved

Land Pride provides this publication "as is" without warranty of any kind, either expressed or implied. While every precaution has been taken in the preparation of this manual, Land Pride assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein. Land Pride reserves the right to revise and improve its products as it sees fit. This publication describes the state of this product at the time of its publication, and may not reflect the product in the future.

Land Pride is a registered trademark.

All other brands and product names are trademarks or registered trademarks of their respective holders.

Printed in the United States of America.

See previous page for Table of contents.



### ***Parts Manual QR Locator***

The QR (Quick Reference) code on the cover and to the left will take you to the Parts Manual for this equipment. Download the appropriate App on your smart phone, open the App, point your phone on the QR code and take a picture.



### ***Dealer QR Locator***

The QR code on the left will link you to available dealers for Land Pride products. Refer to Parts Manual QR Locator on this page for detailed instructions.

These are common practices that may or may not be applicable to the products described in this manual.

## Safety at All Times

Careful operation is your best insurance against an accident.

All operators, no matter how much experience they may have, should carefully read this manual and other related manuals before operating the power machine and this implement.

It is the owner's obligation to instruct all operators in safe operation.

- ▲ Thoroughly read and understand the "Safety Label" section, read all instructions noted on them.
- ▲ Do not operate the equipment while under the influence of drugs or alcohol as they impair the ability to safely and properly operate the equipment.
- ▲ The operator should be familiar with all functions of the tractor and attached implement, and be able to handle emergencies quickly.
- ▲ Make sure all guards and shields are in place and secured before operating implement.
- ▲ Keep all bystanders away from equipment and work area.
- ▲ Start tractor from the driver's seat with hydraulic controls in neutral.
- ▲ Operate tractor and controls from the driver's seat only.
- ▲ Never dismount from a moving tractor or leave tractor unattended with engine running.
- ▲ Do not allow anyone to stand between tractor and implement while backing up to implement.
- ▲ Keep hands, feet, and clothing away from power-driven parts.
- ▲ While transporting and operating equipment, watch out for objects overhead and along side such as fences, trees, buildings, wires, etc.
- ▲ Do not turn tractor so tight as to cause hitched implement to ride up on the tractor's rear wheel.
- ▲ Store implement in an area where children normally do not play.



## Look For The Safety Alert Symbol

The SAFETY ALERT SYMBOL indicates there is a potential hazard to personal safety and extra precaution must be taken. When you see this symbol, be alert and carefully read the message that follows it. Hazard control, and accident prevention are dependent upon the awareness, concern, prudence, and proper training of personnel involved in the operation, transport, maintenance, and storage of equipment.

### Be Aware of Signal Words

A signal word designates a degree or level of hazard seriousness. The signal words are:

#### **DANGER**

Indicates a hazardous situation that, if not avoided, will result in death or serious injury.

#### **WARNING**

Indicates a hazardous situation that, if not avoided, could result in death or serious injury.

#### **CAUTION**

Indicates a hazardous situation that, if not avoided, may result in minor or moderate injury.


## Safety Precautions for Children

**Tragedy can occur if the operator is not alert to the presence of children. Children generally are attracted to implements and their work.**

- ▲ Never assume children will remain where you last saw them.
- ▲ Keep children out of the work area and under the watchful eye of a responsible adult.
- ▲ Be alert and shut the implement and tractor down if children enter the work area.
- ▲ Never carry children on the tractor or implement. There is not a safe place for them to ride. They may fall off and be run over or interfere with the control of the power machine.
- ▲ Never allow children to operate the power machine, even under adult supervision.
- ▲ Never allow children to play on the power machine or implement.
- ▲ Use extra caution when backing up. Before the tractor starts to move, look down and behind to make sure the area is clear.

## Tractor Shutdown & Storage


- ▲ If engaged, disengage power take-off.
- ▲ Park on solid, level ground and lower implement to ground or onto support blocks.
- ▲ Put tractor in park or set park brake, turn off engine, and remove ignition key to prevent unauthorized starting.
- ▲ Relieve all hydraulic pressure to auxiliary hydraulic lines.
- ▲ Wait for all components to stop before leaving operator's seat.
- ▲ Use steps, grab-handles and skid-resistant surfaces when getting on and off the tractor.
- ▲ Detach and store implement in an area where children normally do not play. Secure implement using blocks and supports.



These are common practices that may or may not be applicable to the products described in this manual.


### Use A Safety Chain

- ▲ A safety chain will help control drawn machinery should it separate from the tractor drawbar.
- ▲ Use a chain with the strength rating equal to or greater than the gross weight of the towed implement.
- ▲ Attach the chain to the tractor drawbar support or other specified anchor location. Allow only enough slack in the chain to permit turning.
- ▲ Always hitch the implement to the machine towing it. Do not use the safety chain to tow the implement.

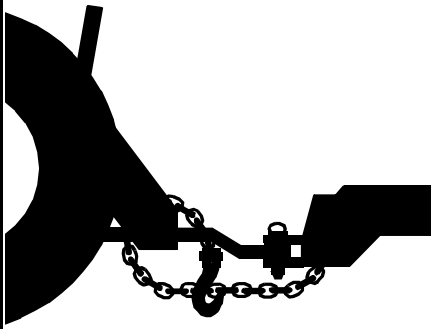

### Transport Safely

- ▲ Comply with state and local laws.
- ▲ Use towing vehicle and trailer of adequate size and capacity. Secure equipment towed on a trailer with tie downs and chains.
- ▲ Sudden braking can cause a towed trailer to swerve and upset. Reduce speed if towed trailer is not equipped with brakes.
- ▲ Avoid contact with any over head utility lines or electrically charged conductors.
- ▲ Always drive with load on end of loader arms low to the ground.
- ▲ Always drive straight up and down steep inclines with heavy end of a tractor with loader attachment on the "uphill" side.
- ▲ Engage park brake when stopped on an incline.
- ▲ Maximum transport speed for an attached equipment is 20 mph. DO NOT EXCEED. Never travel at a speed which does not allow adequate control of steering and stopping. Some rough terrains require a slower speed.
- ▲ As a guideline, use the following maximum speed weight ratios for attached equipment:
  - 20 mph** when weight of attached equipment is less than or equal to the weight of machine towing the equipment.
  - 10 mph** when weight of attached equipment exceeds weight of machine towing equipment but not more than double the weight.
- ▲ **IMPORTANT:** Do not tow a load that is more than double the weight of the vehicle towing the load.

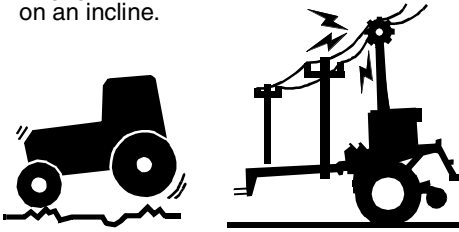

### Tire Safety

- ▲ Tire changing can be dangerous and must be performed by trained personnel using the correct tools and equipment.
- ▲ Always maintain correct tire pressure. Do not inflate tires above recommended pressures shown in the Operator's Manual.
- ▲ When inflating tires, use a clip-on chuck and extension hose long enough to allow you to stand to one side and NOT in front of or over the tire assembly. Use a safety cage if available.
- ▲ Securely support the implement when changing a wheel.
- ▲ When removing and installing wheels, use wheel handling equipment adequate for the weight involved.
- ▲ Make sure wheel bolts have been tightened to the specified torque.



### Practice Safe Maintenance


- ▲ Understand procedure before doing work. Refer to the Operator's Manual for additional information.
- ▲ Work on a level surface in a clean dry area that is well-lit.
- ▲ Lower implement to the ground and follow all shutdown procedures before leaving the operator's seat to perform maintenance.
- ▲ Do not work under any hydraulically supported equipment. It can settle, suddenly leak down, or be lowered accidentally. If it is necessary to work under the equipment, securely support it with stands or suitable blocking beforehand.
- ▲ Use properly grounded electrical outlets and tools.
- ▲ Use correct tools and equipment for the job that are in good condition.
- ▲ Allow equipment to cool before working on it.
- ▲ Disconnect battery ground cable (-) before servicing or adjusting electrical systems or before welding on implement.
- ▲ Inspect all parts. Make certain parts are in good condition & installed properly.
- ▲ Replace parts on this implement with genuine Land Pride parts only. Do not alter this implement in a way which will adversely affect its performance.
- ▲ Do not grease or oil implement while it is in operation.
- ▲ Remove buildup of grease, oil, or debris.
- ▲ Always make sure any material and waste products from the repair and maintenance of the implement are properly collected and disposed.
- ▲ Remove all tools and unused parts from equipment before operation.
- ▲ Do not weld or torch on galvanized metal as it will release toxic fumes.



**These are common practices that may or may not be applicable to the products described in this manual.**

### Prepare for Emergencies

- ▲ Be prepared if a fire starts.
- ▲ Keep a first aid kit and fire extinguisher handy.
- ▲ Keep emergency numbers for doctor, ambulance, hospital, and fire department near phone.

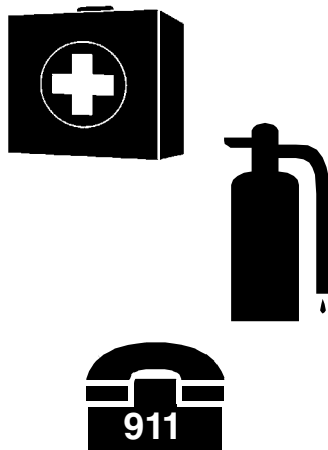

### Wear Personal Protective Equipment (PPE)

- ▲ Wear protective clothing and equipment appropriate for the job such as safety shoes, safety glasses, hard hat, dust mask, and ear plugs.
- ▲ Clothing should fit snug without fringes and pull strings to avoid entanglement with moving parts.
- ▲ Prolonged exposure to loud noise can cause hearing impairment or hearing loss. Wear suitable hearing protection such as earmuffs or earplugs.
- ▲ Operating a machine safely requires the operator's full attention. Avoid wearing headphones while operating equipment.




### Avoid High Pressure Fluids

- ▲ Escaping fluid under pressure can penetrate the skin causing serious injury.
- ▲ Relieve all residual pressure before disconnecting hydraulic lines or performing work on the hydraulic system.
- ▲ Make sure all hydraulic fluid connections are properly tightened/torqued and all hydraulic hoses and lines are in good condition before applying pressure to the system.
- ▲ Use a piece of paper or cardboard, NOT BODY PARTS, to check for suspected leaks.
- ▲ Wear protective gloves and safety glasses or goggles when working with hydraulic systems.
- ▲ **DO NOT DELAY.** If an accident occurs, see a doctor familiar with this type of injury immediately. Any fluid injected into the skin or eyes must be treated within a few hours or gangrene may result.




### Use Safety Lights and Devices

- ▲ Slow moving tractors, and self-propelled equipment can create a hazard when driven on public roads. They are difficult to see, especially at night. Use the Slow Moving Vehicle (SMV) sign when on public roads.
- ▲ Flashing warning lights and turn signals are recommended whenever driving on public roads.

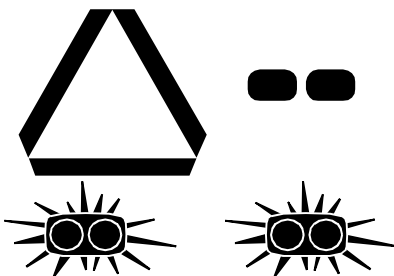


### Use Seat Belt and ROPS

- ▲ Land Pride recommends the use of a CAB or roll-over-protective-structures (ROPS) and seat belt in almost all power machines. Combination of a CAB or ROPS and seat belt will reduce the risk of serious injury or death if the power machine should be upset.
- ▲ If ROPS is in the locked-up position, fasten seat belt snugly and securely to help protect against serious injury or death from falling and machine overturn.



### Keep Riders Off Machinery

- ▲ Never carry riders or use tractor to lift or transport individuals.
- ▲ There is not a safe place for a person to ride.
- ▲ Riders obstruct operator's view and interfere with the control of the power machine.
- ▲ Riders can be struck by objects or thrown from the equipment.

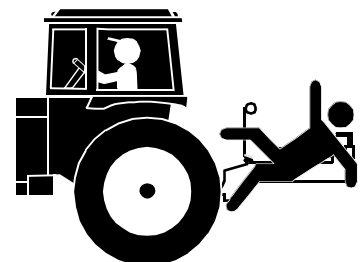

These are common practices that may or may not be applicable to the products described in this manual.

### **Avoid crystalline Silica (quartz) Dust**

Because crystalline silica is a basic component of sand and granite, many activities at construction sites produce dust containing crystalline silica. Trenching, sawing, and boring of material containing crystalline silica can produce dust containing crystalline silica particles. This dust can cause serious injury to the lungs (silicosis).

There are guidelines which should be followed if crystalline silica (quartz) is present in the dust.



- ▲ Be aware of and follow OSHA (or other local, State, or Federal) guidelines for exposure to airborne crystalline silica.
- ▲ Know the work operations where exposure to crystalline silica may occur.
- ▲ Participate in air monitoring or training programs offered by the employer.
- ▲ Be aware of and use optional equipment controls such as water sprays, local exhaust ventilation, and enclosed cabs with positive pressure air conditioning if the machine has such equipment. Otherwise respirators shall be worn.
- ▲ Where respirators are required, wear a respirator approved for protection against crystalline silica containing dust. Do not alter respirator in any way. Workers who use tight-fitting respirators can not have beards/mustaches which interfere with the respirator seal to the face.
- ▲ If possible, change into disposable or washable work clothes at the work site; shower and change into clean clothing before leaving the work site.
- ▲ Do not eat, drink, use tobacco products, or apply cosmetics in areas where there is dust containing crystalline silica.
- ▲ Store food, drink, and personal belongings away from the work area.
- ▲ Wash hands and face before eating, drinking, smoking, or applying cosmetics after leaving the exposure area.

### **Handle Chemicals Properly**

- ▲ Protective clothing should be worn.
- ▲ Handle all chemicals with care.
- ▲ Follow instructions on container label.
- ▲ Chemicals can be dangerous. Improper use can seriously injure persons, animals, plants, soil, and property.
- ▲ Inhaling smoke from any type of chemical fire is a serious health hazard.
- ▲ Store or dispose of unused chemicals as specified by the chemical manufacturer.



### **Dig Safe - Avoid Underground Utilities**

- ▲ **USA: Call 811**  
**CAN: [digsafecanada.ca](http://digsafecanada.ca)**  
Always contact your local utility companies (electrical, telephone, gas, water, sewer, and others) before digging so that they may mark the location of any underground services in the area.
- ▲ Be sure to ask how close you can work to the marks they positioned.





This page left blank intentionally.

### Safety Labels

Your Grading Scraper comes equipped with all safety labels in place. They were designed to help you safely operate your implement. Read and follow their directions.


1. Keep all safety labels clean and legible.
2. Refer to this section for proper label placement. Replace all damaged or missing labels. Order new labels from your nearest Land Pride dealer. To find your nearest dealer, visit our dealer locator at [www.landpride.com](http://www.landpride.com).
3. Some new equipment installed during repair requires safety labels to be affixed to the replaced component as

specified by Land Pride. When ordering new components make sure the correct safety labels are included in the request.

4. Refer to this section for proper label placement.

To install new labels:

- a. Clean surface area where label is to be placed.
- b. Spray soapy water onto the cleaned area.
- c. Peel backing from label and press label firmly onto the surface.
- d. Squeeze out air bubbles with edge of a credit card or with a similar type of straight edge.

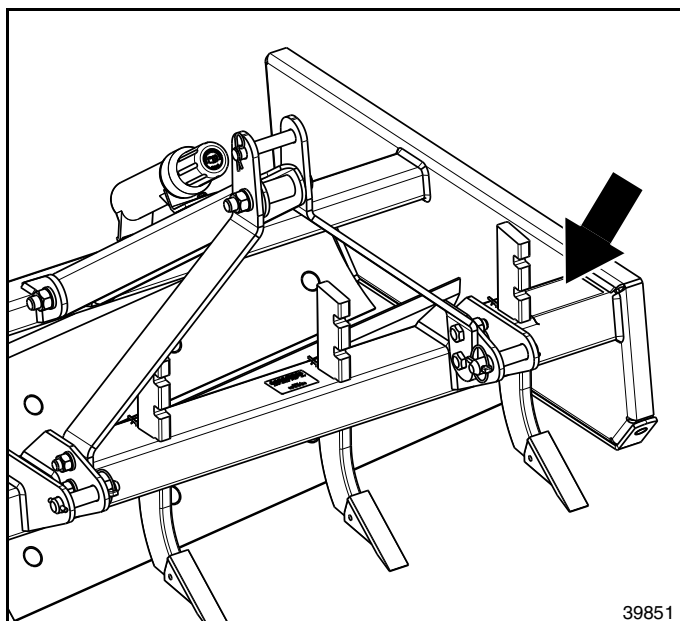

39851

### **WARNING**

To Avoid Injury or Machine Damage:

- Read Operator's Manual **BEFORE** using machine. Contact dealer for manual.
- Keep others away during operation.
- DO NOT allow riders.
- Lower Box Scraper to the ground, stop tractor engine, set the park brake, and remove ignition key **BEFORE** servicing, adjusting, or repairing.
- DO NOT put feet under box scraper when removing or adjusting shanks.

818-267C

 **WARNING:** Cancer and reproductive harm · [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## 818-267C

Caution Avoid Injury

Land Pride welcomes you to the growing family of new product owners. This Grading Scraper has been designed with care and built by skilled workers using quality materials. Proper assembly, maintenance, and safe operating practices will help you get years of satisfactory use from this product

## Application

Land Pride GS05 Series Grading Scrapers come in 48" & 60" working widths and have uses and applications in landscaping, hobby farms, and small estates. These Grading Scrapers are uniquely designed to be extra user friendly and a low cost alternative for road grading applications. Unlike a box scraper, they are not designed to transfer large volumes of dirt from one location to another and as a result do not require the additional horsepower that a box scraper normally requires. Nor does it require the tending of tractor 3-point lift controls to maintain grade that a box scraper might require.

Simply setting a properly adjusted GS05 Series Grading Scraper on the ground and driving forward enables the operator to grade off high spots and fill in ruts and low spots on unimproved roads and lanes with little or no manipulation of the tractor's 3-point hitch controls. Unlike a rear blade, they require no adjustment of blade angling or offset positions. The GS05 Series Grading Scraper simply and quickly moves dirt or aggregate from high spots to low spots. Should a large accumulation of unwanted buildup of soil or aggregate occur between the blades, initiating a slight raise on the tractor's lift controls will allow excess material to flow out uniformly and evenly under the leveling scraper blades.

See "**Specifications & Capacities**" on page 15 and "**Features & Benefits**" on page 16 for additional information and performance enhancing options.

## Using This Manual

- This Operator's Manual is designed to help familiarize you with safety, assembly, operation, adjustments, troubleshooting, and maintenance. Read this manual and follow the recommendations to help ensure safe and efficient operation.
- The information contained within this manual was current at the time of printing. Some parts may change slightly to assure you of the best performance.
- To order a new Operator's or Parts Manual contact your authorized dealer. Manuals can also be downloaded, free-of-charge, from our website at [www.landpride.com](http://www.landpride.com).

## Terminology

"Right" or "Left" as used in this manual is determined by facing the direction the machine will operate while in use unless otherwise stated.

## Definitions

**NOTE:** A special point of information that the operator should be aware of before continuing.

**IMPORTANT:** A special point of information related to the following topic. Land Pride's intention is this information must be read & noted before continuing.


## Owner Assistance

The dealer should complete the Online Warranty Registration at the time of purchase. This information is necessary to provide you with quality customer service.

The parts on your Grading Scraper have been specially designed by Land Pride and should only be replaced with genuine Land Pride parts. Contact a Land Pride dealer if customer service or repair parts are required. Your Land Pride dealer has trained personnel, repair parts, and equipment needed to service the attachment.

## Serial Number

For quick reference and prompt service, record model and serial number on the inside cover page and again on the warranty page. Always provide model number and serial number when ordering parts and in all correspondences with your Land Pride dealer. For location of your serial number plate, see Figure 1.

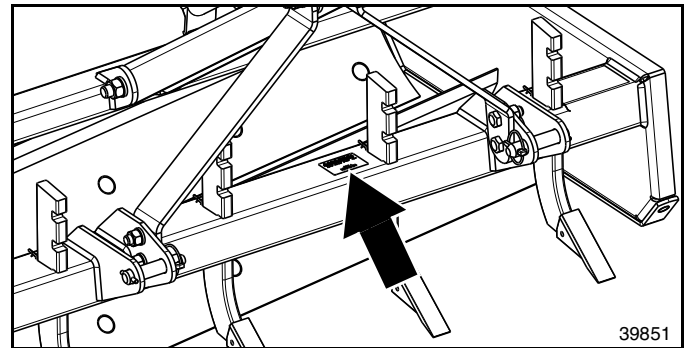

Serial Number Plate Location  
Figure 1

## Further Assistance

Your dealer wants you to be satisfied with your new Grading Scraper. If for any reason you do not understand any part of this manual or are not satisfied with the service received, the following actions are suggested:

1. Discuss any problems you have with your implement with your dealership service personnel so they can address the problem.
2. If you are still not satisfied, seek out the owner or general manager of the dealership, explain the question/problem, and request assistance.
3. For further assistance write to:

**Land Pride Service Department**  
1525 East North Street  
P.O. Box 5060  
Salina, Ks. 67402-5060

E-mail address  
[lp servicedept@landpride.com](mailto:lp servicedept@landpride.com)

## Tractor Requirements

Tractor horsepower should be within the range noted below. Tractors outside the horsepower range must not be used.

Horsepower Rating . . . . . 17 to 33 hp  
Hitch Type . . . . . Cat. I 3-point

### WARNING

*To avoid serious injury or death:*

*Lightweight tractors with rear attached implements may need weights added to the front to maintain steering control. Consult your tractor Operator's Manual to determine proper weight requirements and maximum weight limitations.*

## Torque Requirements

Refer to “**Torque Values Chart**” on page 17 to determine correct torque values for common bolts.

## Before You Start

Make sure the intended tractor conforms to the requirements provided on this page. Also, read and understand this Operator's Manual for your Grading Scraper. An understanding of how it works will aid in its assembly and set-up.

Go through the “**Assembly Checklist**” on this page before assembling the Claw Grapple. To speed up your assembly task and make the job safer, have all needed parts and equipment readily at hand.

### Assembly Checklist

| ✓                        | Check                                                                                                                                | Ref.                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| <input type="checkbox"/> | Have a fork lift or loader with properly sized chains capable of lifting the equipment on hand.                                      |                       |
| <input type="checkbox"/> | Make sure all major components and loose parts are shipped with the attachment.                                                      | Assembly & Set-up     |
| <input type="checkbox"/> | Double check to make sure all parts, fasteners, and pins are installed in the correct location. Refer to the Parts Manual if unsure. | Parts Manual 303-474P |
| <input type="checkbox"/> | Make sure working parts move freely, and bolts are tight.                                                                            | Operator's Manual     |
| <input type="checkbox"/> | Make sure all safety labels are correctly located and legible. Replace if damaged.                                                   | Page 4                |

## Tractor Shutdown Procedure

The following are basic tractor shutdown procedures. Follow these procedures and any additional shutdown procedures provided in your tractor Operator's Manual before leaving the operator's seat.

1. Reduce engine speed and disengage power take-off if engaged.
2. Park tractor and implement on level, solid ground.
3. Lower implement to ground or onto non-concrete support blocks.
4. Put tractor in park or set park brake, turn off engine, and remove switch key to prevent unauthorized starting.
5. Relieve all hydraulic pressure to auxiliary hydraulic lines.
6. Wait for all components to come to a complete stop before leaving the operator's seat.
7. Use steps, grab-handles and anti-slip surfaces when stepping on and off the tractor.

## Section 1: Assembly &amp; Set-up

## Hitch &amp; Shank Assembly

Refer to Figure 1-1:


Make adjustments to the implement after it has been properly attached to a tractor and secured with solid non-concrete supports in the up position. Never work around or under equipment supported by hydraulics. Hydraulics can drop equipment instantly if controls are actuated or if hydraulic lines burst even when power to hydraulics is shut off.

## ! WARNING

To prevent serious injury or death:

- Always keep your body extremities out from under the shanks while adjusting them. It is possible for the shanks to fall causing injury to your feet and/or legs.
- Keep clear of the shank slots while adjusting shank height. Shanks can pinch body parts in the slots during adjustments.

1. Disassemble nuts (11), lock washers (12), bolts (#5), nuts (#7), lock washers (8), and bolts (#6A & #6B). Keep for reuse.
2. Attach channel brace (#3) to rear mounting lugs with 3/4"-10 x 5" GR5 cap screw (#6B), lock washer (8), and hex nut (#7) as shown. Do not tighten bolt at this time.
3. Attach hitch straps (#1 & #2) to holes in clevis plates with four 5/8"-11 x 1 3/4" GR5 cap screws (#5), lock washers (12), and hex nuts (11) as shown. Do not tighten bolts at this time.
4. Attach channel brace (#3) and spacer (#4) to hitch straps (#1 & #2) as shown with 3/4"-10 x 5" GR5 cap screw (#6A), lock washer (8), and hex nut (#7). Do not tighten bolt at this time.
5. Tighten bolts (#5, #6A, & #6B) to the correct torque.
6. Install 3/4" x 3 15/16" clevis pin (#10) to the hitch straps (#1 & #2) and secure in place with hairpin cotter (#9).
7. Either manually raise the front of the scraper up and support it on two 4" high support blocks or hook the scraper to a tractor with a Category I 3-point hitch. Refer to "3-Point Hook-up" on page 8.
8. If hooked to a tractor, raise scraper up about 6". Without lowering the scraper, shut tractor down properly before dismounting. See "Tractor Shutdown Procedure" on page 6.
9. Place 4" high support blocks under the four corners of the scraper.
10. Restart tractor and lower scraper onto the blocks.
11. Shut tractor down properly before dismounting.
12. Insert one of the two center shanks (#13) up through one of two slots "A" to the desired height and secure with shank retainer clip (#14).
13. Repeat step 12 with remaining shank (#13).

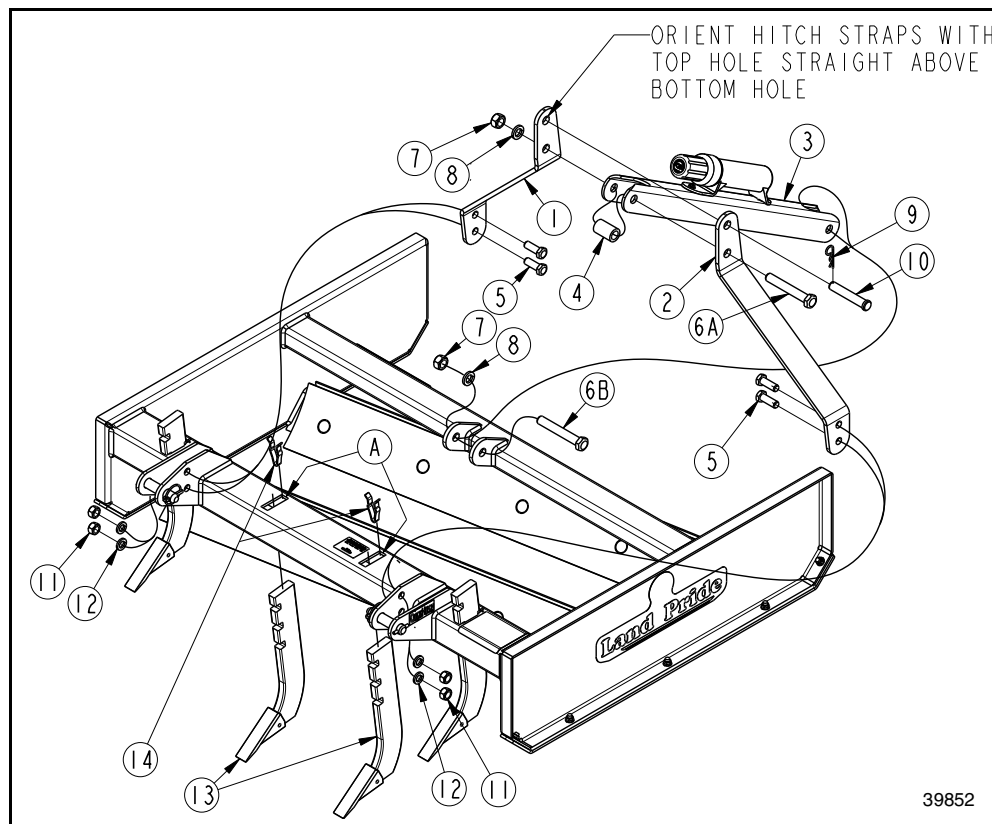

Hitch and Shank Set-up  
Figure 1-1

### 3-Point Hook-up

#### DANGER

To avoid serious injury or death:

A crushing hazard exists while hooking-up and unhooking the implement. Keep people and animals away while backing-up to the implement or pulling away from the implement. Do not operate hydraulic controls while a person or animal is directly behind the power machine or near the implement.

#### WARNING

To avoid serious injury or death:


- Lightweight tractors with rear attached implements may need weights added to the front to maintain steering control. Consult your tractor Operator's Manual to determine proper weight requirements and maximum weight limitations.
- Always shut tractor down using "Tractor Shutdown Procedure" provided in this manual before allowing anyone including the operator to hook-up and unhook implement.

**NOTE:** Land Pride's Quick Hitch can be attached to the tractor to provide quick and easy 3-point hook-up and detachment. See your nearest Land Pride dealer to purchase a Quick Hitch.

#### Refer to Figure 1-2:

A 3-point Category I hitch is required. The lower 3-point arms of the 3-point hitch must be stabilized to prevent side-to-side movement. Most tractors have sway blocks or adjustable chains for this purpose.

1. Slowly back tractor up to the Grading Scraper while using the tractor's 3-point hydraulic control to align lower hitch arm holes with clevis pin holes on the scraper.
2. Shut tractor down. See "Tractor Shutdown Procedure" on page 6.
3. With lower lift arms positioned between clevis lugs and aligned with clevis pin holes, insert hitch pins (#1) and secure with linchpins (#2).
4. Connect top center 3-point link to upper pivot hitch using clevis pin (#3) and hair pin (#4).
5. Ensure that the lower lift arms are stabilized to prevent excessive side movement.
6. Return to the tractor and slowly operate controls up and down to check for clearance between scraper frame, tractor tires and tractor drawbar. Move or remove drawbar if it interferes with scraper.
7. See "Level Scraper" on page 9.

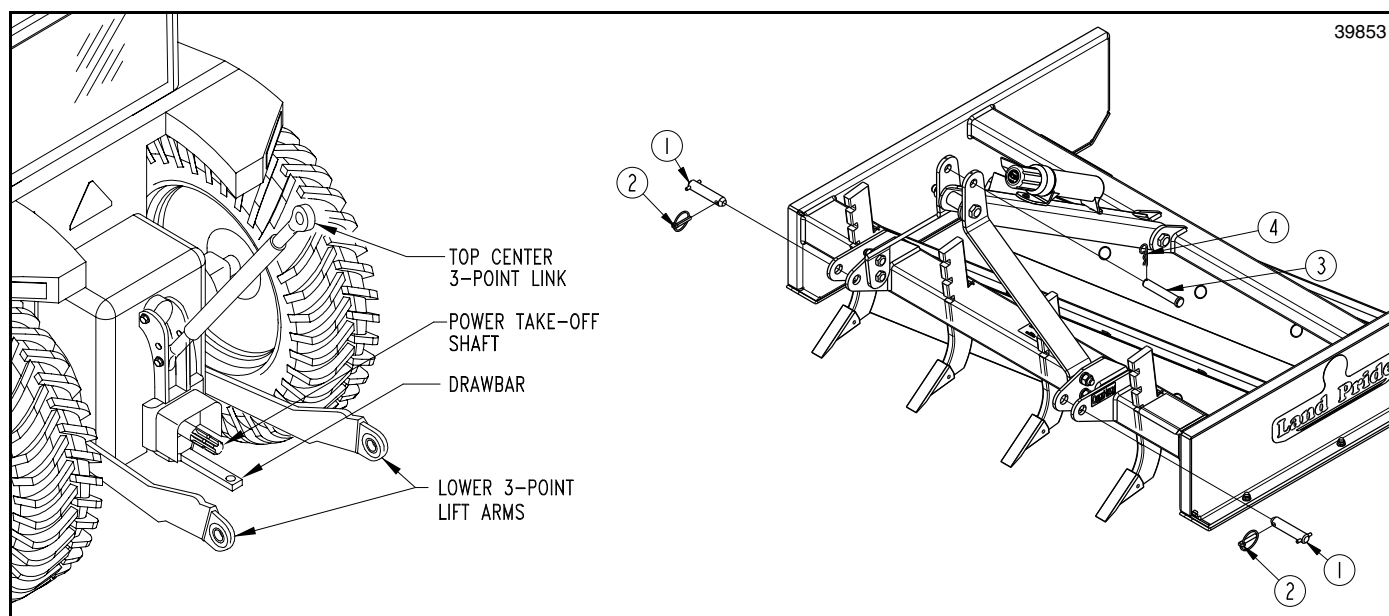

Tractor 3-Point Hitch  
Figure 1-2



## Section 2: Adjustments

### Level Scraper

#### WARNING

To avoid serious injury or death:

Always keep your body extremities out from under the implement. Hydraulics can drop the implement if a line burst or if lift controls are accidentally actuated.

The Grading Scraper should be leveled from left to right and front to back.

1. Park tractor with Grading Scraper on a level surface.
2. Shut tractor down. See **“Tractor Shutdown Procedure”** on page 6.
3. Manually adjust one of the lower lift arms on the tractor up or down to level the Grading Scraper from left to right.
4. Manually adjust length of top-center-link to level scraper from front to rear.

### Shank Depth Adjustment

#### WARNING


To avoid serious injury or death:

Always keep your body extremities out from under the shanks while adjusting them. It is possible for the shanks to fall causing injury to your feet and/or legs.


Refer to **Figure 2-1:**

The GS05 has three shank height settings. Shank settings are based on the vertical distance measured from bottom edge of skid shoes to bottom edge of shank tips.


1. Either manually raise the front of the scraper up and support it on two 4" high support blocks or hook the scraper to a tractor with a Category I 3-point hitch. Refer to **“3-Point Hook-up”** on page 8.
2. If hooked to a tractor, raise scraper up about 6". Without lowering the scraper, shut tractor down properly before dismounting. See **“Tractor Shutdown Procedure”** on page 6.
3. Place 4" high support blocks under the four corners of the scraper.
4. Restart tractor and lower scraper onto the blocks.
5. Shut tractor down properly before dismounting.
6. Remove shank retainer clip (#1).
7. Adjust shank (#2) up or down to the desired depth and then replace shank retainer clip (#1).
8. Repeat steps 7 & 8 with remaining shanks.

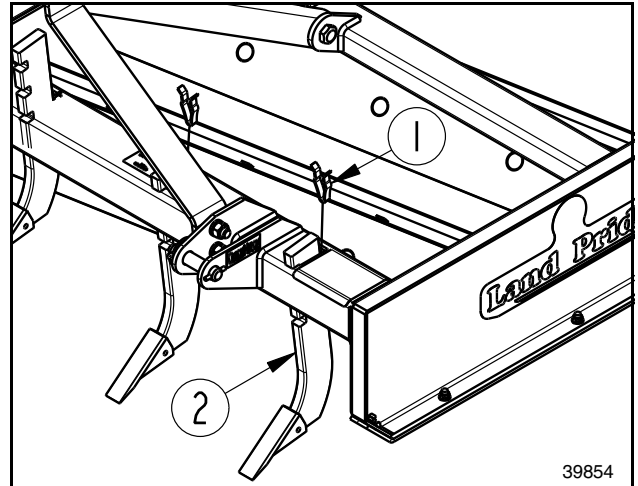

3 3/4" Below Skid Shoes

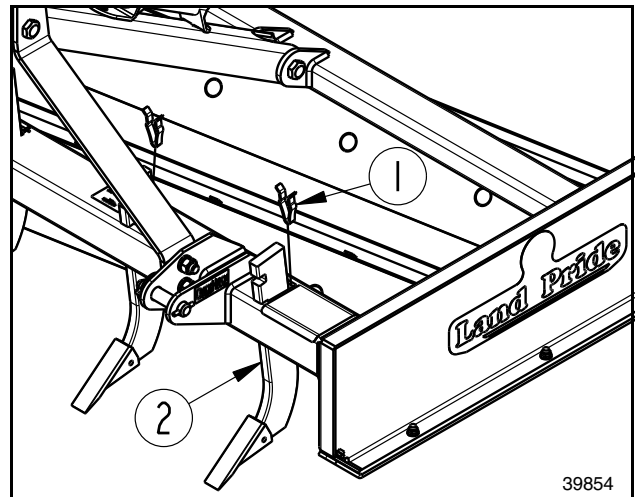

1 1/2" Below Skid Shoes

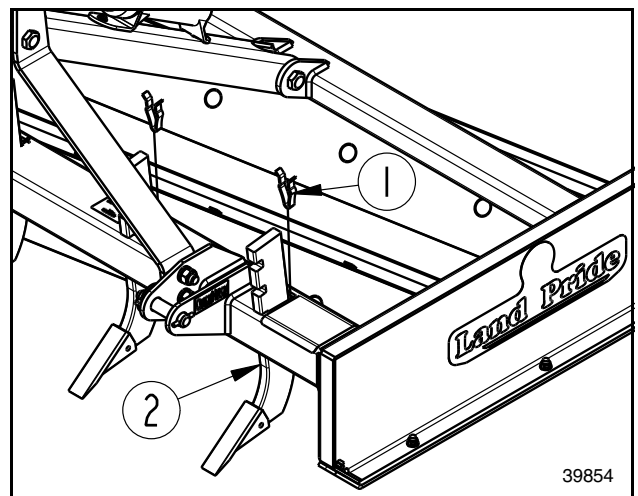

1/2" Above Skid Shoes

Shank Settings  
Figure 2-1

## Operating Checklist

Hazard control and accident prevention are dependent upon the awareness, concern, prudence, and proper training involved in the operation, transport, maintenance, and storage of the Grading Scraper. Therefore, it is absolutely essential that no one operates the Grading Scraper unless they are age 16 or older and have read, fully understood, and are totally familiar with the Operator's Manual. Make sure the operator has paid particular attention to:

- **Important Safety Information**, pages 1 to 4
- **Section 1: Assembly & Set-up**, page 6
- **Section 2: Adjustments**, page 9
- **Section 3: Operating Instructions**, page 10
- **Section 5: Maintenance**, page 13

Perform the following inspections before using your Grading Scraper.

### Operating Checklist

| ✓ | Check                                                                                                 | Page |
|---|-------------------------------------------------------------------------------------------------------|------|
|   | The operator has read and understood how to operate the Grading Scraper.                              | 1    |
|   | Check 3-point hook-up procedure. Be sure all pins have been installed and are secured.                | 8    |
|   | All adjustments have been made and pins have been installed and are secured.                          | 9    |
|   | Check the scraper initially and periodically for loose bolts & pins. See <i>Torque Values Chart</i> . | 17   |

## Safety Information

### DANGER

To avoid serious injury or death:

- Allow only persons to operate this implement who have fully read and comprehended this manual, who have been properly trained in the safe operation of this implement, and who are age 16 or older. Serious injury or death can result from the inability to read, understand, and follow instructions provided in this manual.
- Make adjustments to the implement after it has been properly attached to a tractor and secured with solid non-concrete supports in the up position. Never work around or under equipment supported by hydraulics. Hydraulics can drop equipment instantly if controls are actuated or if hydraulic lines burst even when power to hydraulics is shut off.
- Do not allow anyone near the tractor or implement while operating. Stop operation if bystanders are too close. They can be hit by flying projectiles, become entangled in the equipment, or ran over.
- Always secure equipment with solid, non-concrete supports before working under it. Never go under equipment supported by concrete blocks or hydraulics. Concrete can break, hydraulic lines can burst, and/or hydraulic controls can be actuated even when power to hydraulics is off.

### WARNING

To avoid serious injury or death:

- Never carry riders on the implement or tractor. Riders can obstruct the operator's view, interfere with controls, be pinched by moving components, become entangled in rotating components, struck by objects, thrown about, fall off and be run over, etc.
- Allow only persons to operate this implement who have fully read and comprehended this manual, who have been properly trained in the safe operation of this implement, and who are age 16 or older. Serious injury or death can result from the inability to read, understand, and follow instructions provided in this manual.
- Always keep your body extremities out from under the shanks and cutting blades while removing, installing, and adjusting them. It is possible for the cutting blades and/or shanks to fall causing injury to your body.
- Do not use implement to tow other equipment unless it is designed with a tow hitch. Doing so can result in loss of control and damage the equipment.
- Do not use implement to lift objects; to pull objects such as fence posts, stumps, etc; or to push objects. The unit is not designed or guarded for these uses.
- Do not use implement as a man lift, work platform or as a wagon to carry objects. It is not properly designed or guarded for this use.
- Perform scheduled maintenance. Check for loose hardware, missing parts, broken parts, structural cracks, and excessive wear. Make repairs before putting the implement back into service.
- Do not alter implement or replace parts on the implement with other brands. Other brands may not fit properly or meet OEM (Original Equipment Manufacturer) specifications. They can weaken the integrity and impair the safety, function, performance, and life of the implement. Replace parts only with genuine OEM parts.
- Make sure safety labels are in their proper location and are in good condition before operating the attached implement. Read and obey all instructions on the labels.
- Always keep your body extremities out from under the shanks while adjusting them. It is possible for the shanks to fall causing injury to your feet and/or legs.
- Always keep your body extremities out from under the blade carrier when adjusting cutting blade height. The blade carrier can fall while loosening its bolts.
- Never make contact with underground utilities such as electrical power lines, gas lines, phone lines, etc. They can cause serious injury or death from electrocution, explosion, or fire. If in doubt, call 811 (USA) before digging so that they can mark the location of underground services in the area. For contact information, see Dig Safe in the "Important Safety Information" starting on page 1.



## Transporting

### **WARNING**

To avoid serious injury or death:

- When traveling on roadways, transport in such a way that other vehicles may pass you safely. Use accessory lights, clean reflectors, and a slow moving vehicle sign that is visible from the back to warn operators in other vehicles of your presence. Always comply with all federal, state, and local laws.
  - Make sure implement does not block tractor's Slow Moving Vehicle (SMV) sign when transporting on a public road. If operators in vehicles approaching from the back cannot easily see the sign, then install one on the implement that is visible to warn of your presence.
  - Select a safe ground speed when transporting. Never travel at a speed which does not allow adequate control of steering and stopping, and never exceed 20 mph (32.2 km/h) with attached equipment. Rough terrain requires a slower speed.
  - Reduce ground speed when turning and leave enough clearance to avoid making contact with obstacles such as buildings, trees, fences, etc. Making contact can result in equipment damage and cause serious injury or death.
1. Be sure to reduce tractor ground speed when turning and leave enough clearance so the Grading Scraper does not contact obstacles such as buildings, trees, or fences.
  2. Select a safe ground travel speed when transporting from one area to another.
  3. When traveling on roadways, transport in such a way that faster moving vehicles may pass you safely.
  4. When traveling over rough or hilly terrain, shift tractor to a lower gear.

## General Operating Instructions

By now you should have read the operator's manual and properly attached your GS05 Series Grading Scraper to your tractor's 3-point hitch. Whether you have chosen our GS0548 or GS0560 the working or grading principals are the same. Simply lower your Grading Scraper until the left and right skid shoes are firmly in contact with the ground, then begin driving forward.

Your two scraper blades should immediately begin grading or shaving off high spots on the surface and allowing dirt or aggregate material to flow under the blades to fill in low spots. Depending on surface conditions, a build up may occur between the blades. This is no cause for concern as the function of a Grading Scraper is to build material up in front of the blades and between the blades and allow material to flow over the blades.


If surface conditions are such that the blades are unsuccessful in shaving off high spots on a hard-packed surface, begin lowering the scarifiers into working position to a depth that enables you to achieve the desired effect. The Land Pride 05 Series Grading Scrapers are very user-friendly attachments and with a little practice you should begin achieving excellent results.

See "**Features & Benefits**" or "**Specifications & Capacities**" for additional information and performance enhancing options.

## Rear Mounted Grader Blades

Refer to Figure 4-1:

An additional set of cutter blades (#1) with plow bolts & flange nuts (#2 & #3) can be purchased through parts and attached to the back side of the GS05 Grading Scrapers. This will allow the grading scraper to be used while traveling forward and when backing-up.

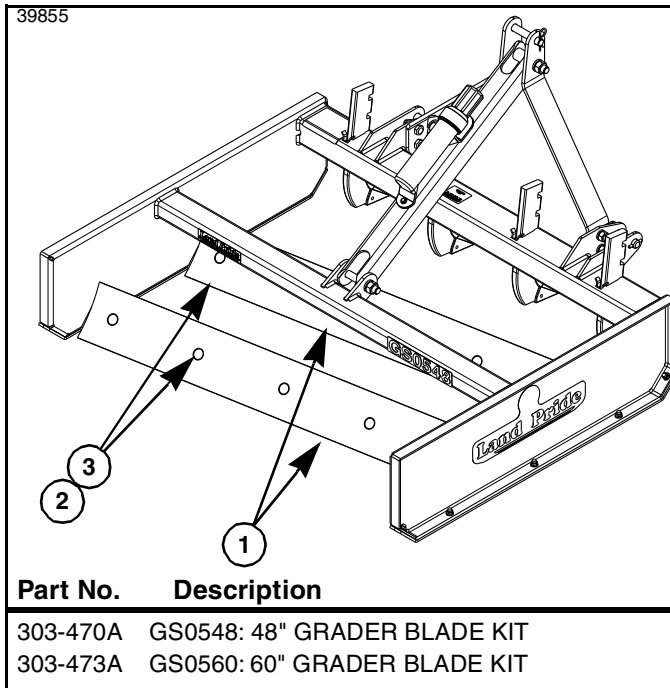

Rear Mounting Grader Blades  
Figure 4-1

## Section 5: Maintenance

### Maintenance

Proper servicing and adjustments are key to the long life of any implement. With careful inspection and routine maintenance, you can avoid costly downtime and repair.

After using your Grading Scraper for several hours, check all bolts to be sure they are tight.

Replace any worn, damaged, or illegible safety labels by obtaining new labels from your Land Pride dealer.

### DANGER

*To avoid serious injury or death:*

*Always secure equipment with solid, non-concrete supports before working under it. Never go under equipment supported by concrete blocks or hydraulics. Concrete can break, hydraulic lines can burst, and/or hydraulic controls can be actuated even when power to hydraulics is off.*

### WARNING


*To avoid serious injury or death:*

- Allow only persons to perform maintenance on this implement who have been properly trained in its safe operation.
- Always shut power machine down using the “Shutdown Procedure” provided in this manual before servicing, adjusting, cleaning, or maintaining the attachment.
- Perform scheduled maintenance. Check for loose hardware, missing parts, broken parts, structural cracks, and excessive wear. Make repairs before putting the implement back into service.
- Do not alter implement or replace parts on the implement with other brands. Other brands may not fit properly or meet OEM (Original Equipment Manufacturer) specifications. They can weaken the integrity and impair the safety, function, performance, and life of the implement. Replace parts only with genuine OEM parts.
- Always keep your body extremities out from under the shanks and cutting blades while removing, installing, and adjusting them. It is possible for the cutting blades and/or shanks to fall causing injury to your body.

### Grader Blades

**Refer to Figure 5-1:**

The front mounted and optional rear mounted grader blades (#2) have two cutting edges. Unbolt blades and turn them over when bottom edges wear out. Inspect plow bolts (#1) and flange nuts (#3) for wear and replace as needed. Reattach blades and torque flange nuts (#3) to 150 ft-lbs. Replace grader blades when both edges are worn out.

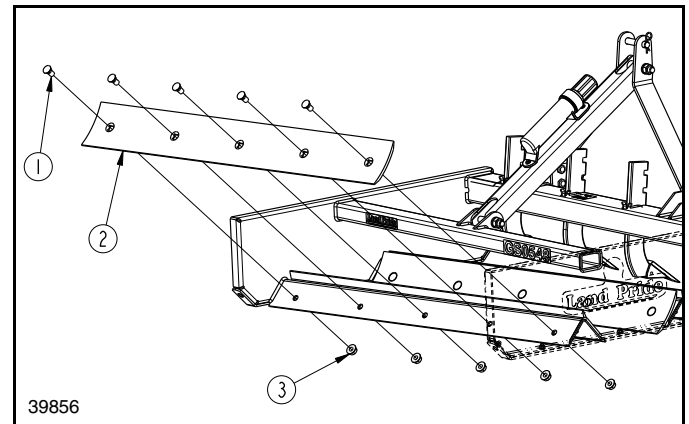


**Cutting Blade Removal**  
Figure 5-1


### Shank Tips

**Refer to Figure 5-2:**

Shank tips (#1) are removable by heating them in the dimpled area on both sides and knocking them off of the shank body (#2) with a blunt punch. New shank tips need to be dimpled with a punch after they are installed on the shank body.

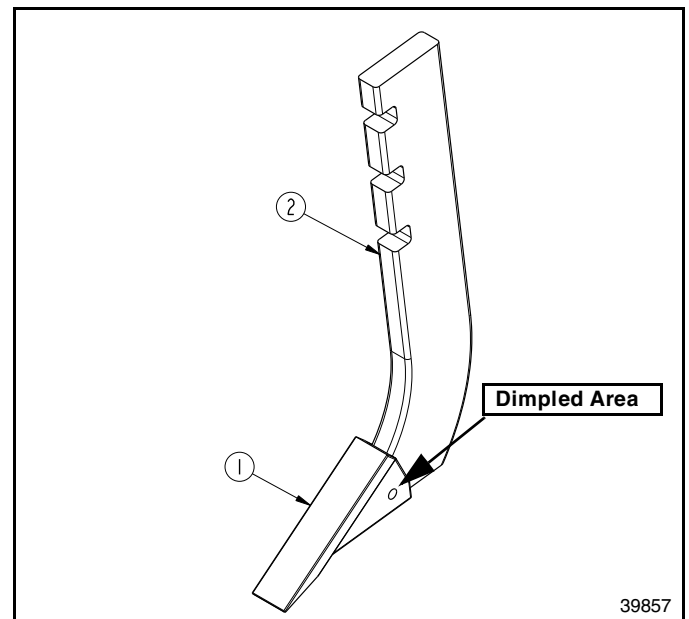

**Shank Tip Removal**  
Figure 5-2

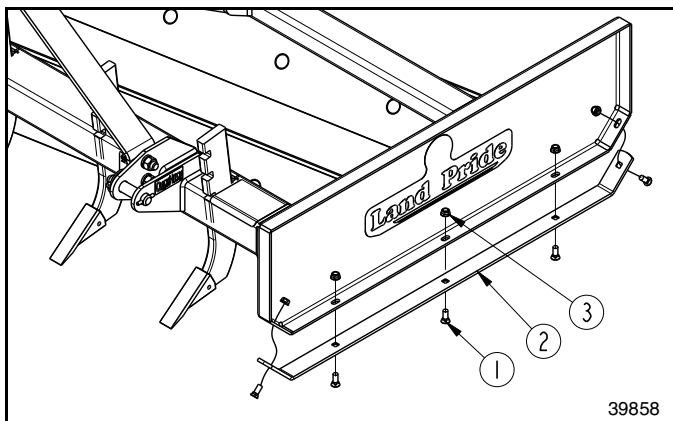

**Skid Shoe Maintenance**  
**Figure 5-3**

## Skid Shoes

Skid shoes should be inspected at the beginning of each season and replaced when material thickness is less than 1/8" at any point. The skid shoe may be turned around to extend its wear life if one end is wearing faster than the other.

Order only genuine Land Pride parts from your local Land Pride dealer when replacing skid shoe components.

Replace or turn skid shoe around as follows:

### Refer to Figure 5-2:

1. Raise Grading Scraper 3" or more off the ground and move the Grading Scraper over support blocks. Make sure support blocks are positioned so they will not interfere with skid shoe replacement.
2. Lower scraper onto support blocks and shut down tractor. See **"Tractor Shutdown Procedure"** on page 6.
3. Remove 3/8" hex whiz nuts (#3), 3/8"-16 plow bolts (#1), and skid shoe (#2) from the grading scraper.
4. Plow bolts (#1) should be checked for wear and replaced if necessary.
5. Turn old skid shoe (#2) around or install new skid shoe (#2) to scraper with 3/8"-16 x 1" GR5 plow bolts (#1) and 3/8" hex flange locknuts (#3). Torque whiz nuts (#3) to 31 ft-lbs.
6. Raise scraper up and drive away from support blocks.

## Long-Term Storage

### DANGER

*To avoid serious injury or death:*

*Always secure equipment with solid, non-concrete supports before working under it. Never go under equipment supported by concrete blocks or hydraulics. Concrete can break, hydraulic lines can burst, and/or hydraulic controls can be actuated even when power to hydraulics is off.*

### WARNING

*To avoid serious injury or death:*

*Always shut power machine down following the "Shutdown Procedure" provided in this manual before leaving the operator's seat.*

Clean, inspect, service, and make necessary repairs to the implement when storing it for long periods and at the end of the season. This will help to ensure the unit is ready for field use the next time you hook-up to it.

1. Clean off any dirt that may have accumulated on the scraper and cutting blade. Scrape off compacted dirt and wash surfaces thoroughly with a garden hose.
2. Check frames and plow bolts for wear and replace if necessary. For additional instructions, see **"Grader Blades"** on page 13.
3. Inspect Grading Scraper for loose, damaged, or worn parts. Adjust and tighten loose parts. When needed, replace parts with genuine Land Parts only.
4. Repaint parts where paint is worn or scratched to prevent rust. Ask your dealer for Land Pride aerosol touch-up paint. They are also available in touch-up bottles with brush, quarts, and gallon sizes by adding TU, QT, or GL to the end of the aerosol part number.

### Land Pride Touch-up Paint

| Part No. | Part Description               |
|----------|--------------------------------|
| 821-011C | PAINT LP BEIGE SPRAY CAN       |
| 821-066C | PAINT ORANGE SPRAY CAN         |
| 821-070C | PAINT GP GLOSS BLACK SPRAY CAN |

5. A light coating of oil or grease may be applied to the lower frames, grader blades, and inside the side panels in lieu of paint to minimize oxidation.
6. Replace all damaged or missing decals.
7. Store Grading Scraper on a level surface in a clean, dry place. Inside storage will reduce maintenance and make for a longer scraper life.

## Ordering Replacement Parts

Land Pride offers equipment in factory standard Beige with black highlights. This implement is also available in Orange.

When ordering an optional color, the suffix number corresponding to the color must be added at the end of the part number. Parts ordered without the suffix number will be supplied in factory standard colors.



**82 . . . . . Orange**

**85 . . . . . Black**

For example, if you are ordering a replacement part with part number 555-555C and the existing part is orange, then add the suffix 82 to the end of the number to make the part number read 555-555C82.

### GS05 Series

| List                                 | Specifications & Capacities                                                                            |                    |
|--------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------|
| Model Numbers                        | GS0548                                                                                                 | GS0560             |
| Working width                        | 48" (1.22 m)                                                                                           | 60" (1.52 m)       |
| Overall width                        | 51 3/8" (1.30 m)                                                                                       | 63 3/8" (1.61 m)   |
| Number of scarifier shanks           | 4                                                                                                      |                    |
| Tractor hp requirement               | 18-33 hp (13.4-24.6 kw)                                                                                |                    |
| Weight without optional rear blades  | 310 lbs (140.6 kg)                                                                                     | 350 lbs (158.8 kg) |
| Weight of optional rear blades       | 57 lbs (25.9 kg)                                                                                       | 70 lbs (31.8 kg)   |
| Overall length                       | 44 3/8" (112.7 cm)                                                                                     |                    |
| Overall height                       | 31 1/8" (79.1 cm)                                                                                      |                    |
| Side panel thickness                 | 3/16" (5 mm) thick with 1 1/2" (3.8 cm) formed edges.                                                  |                    |
| Front main beam & scarifier support. | 4"x 3" (10.2 cm x 7.6 cm) reinforced heavy wall tubing.                                                |                    |
| Rear beam construction               | 3"x 2" (7.6 cm x 5.1 cm) heavy wall tubing.                                                            |                    |
| Skid Shoe Dimensions                 | 1/4" (6 mm) Thick x 1 1/2" (3.8 cm) wide x 40" (1.02 m) long.                                          |                    |
| Scarifier shank construction         | Heat treated, 3-position shank with dimpled-on hardened tips.                                          |                    |
| Grader blades                        | Two 3/8" x 6" (1.0 cm x 15.2 cm) high-carbon, heat-treated blades that are reversible and replaceable. |                    |
| Shank adjustments                    | 3 3/4" and 1 1/2" (9.5 cm and 3.8 cm) below grade level.<br>1/2" (13 mm) above grade level.            |                    |
| Lower 3-point attachment             | Clevis type                                                                                            |                    |
| Hitch type                           | Category 1 and Category 1 Quick Hitch                                                                  |                    |
| Color selections                     | Land Pride Beige or Orange                                                                             |                    |

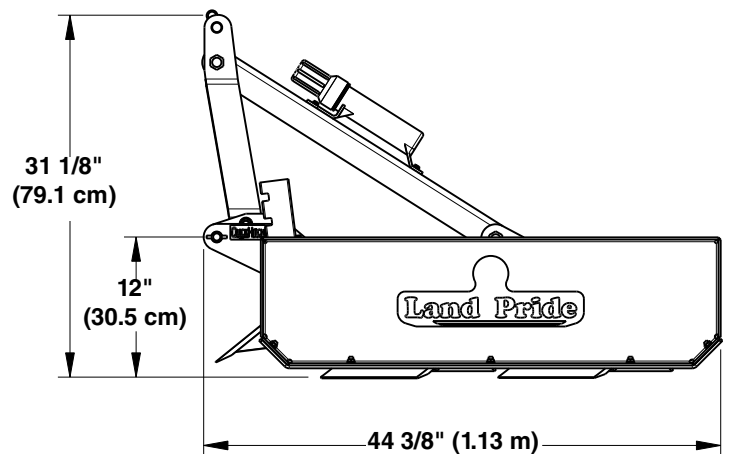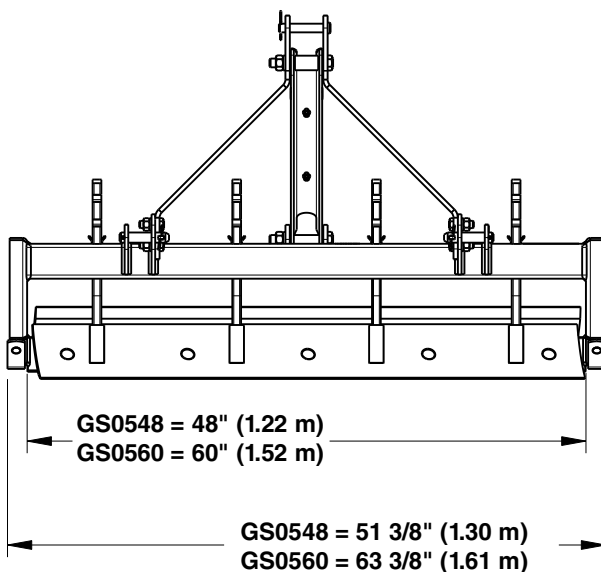

39859

### GS05 Series

| Features                                                                                   | Benefits                                                                                                          |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>Cat. 1 and Cat.1 Quick Hitch compatible.<br/>Has lower hitch clevis type mountings.</b> | Makes for faster and easier hookup to the tractor.                                                                |
| <b>18-33 hp requirements with 48" &amp; 60" working widths.</b>                            | Makes it compatible with many popular smaller sized and properly ballasted compact utility tractors in use today. |
| <b>3-position scarifier shanks.</b>                                                        | Allows the scraper to be adjusted to desired amount of cultivation and grading action.                            |
| <b>Reversible heat-treated, high-carbon steel grading blades.</b>                          | For excellent wear resistance and long service life.                                                              |
| <b>Hardened tips on scarifier shanks.</b>                                                  | Assures long service life.                                                                                        |
| <b>Replaceable and full length skid shoes.</b>                                             | Makes for easier operation and long unit life.                                                                    |
| <b>Reversible skid shoes.</b>                                                              | Extends the life of the skid shoes.                                                                               |
| <b>Heavy duty frame construction.</b>                                                      | Assures long lasting reliability and performance.                                                                 |

| Torque Values Chart for Common Bolt Sizes                                                                  |                                                                                   |                    |       |                                                                                   |         |       |                                                                                                                                                                                                                                      |                                                                                     |           |       |                                                                                     |           |       |                                                                                     |            |
|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--------------------|-------|-----------------------------------------------------------------------------------|---------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------|-------|-------------------------------------------------------------------------------------|-----------|-------|-------------------------------------------------------------------------------------|------------|
| Bolt Size<br>(inches)                                                                                      | Bolt Head Identification                                                          |                    |       |                                                                                   |         |       | Bolt Size<br>(Metric)                                                                                                                                                                                                                | Bolt Head Identification                                                            |           |       |                                                                                     |           |       |                                                                                     |            |
|                                                                                                            |  | Grade 2            |       |  | Grade 5 |       |                                                                                                                                                                                                                                      |  | Class 5.8 |       |  | Class 8.8 |       |  | Class 10.9 |
| in-tpi <sup>1</sup>                                                                                        | N · m <sup>2</sup>                                                                | ft-lb <sup>3</sup> | N · m | ft-lb                                                                             | N · m   | ft-lb | mm x pitch <sup>4</sup>                                                                                                                                                                                                              | N · m                                                                               | ft-lb     | N · m | ft-lb                                                                               | N · m     | ft-lb | N · m                                                                               | ft-lb      |
| 1/4" - 20                                                                                                  | 7.4                                                                               | 5.6                | 11    | 8                                                                                 | 16      | 12    | M 5 X 0.8                                                                                                                                                                                                                            | 4                                                                                   | 3         | 6     | 5                                                                                   | 9         | 7     |                                                                                     |            |
| 1/4" - 28                                                                                                  | 8.5                                                                               | 6                  | 13    | 10                                                                                | 18      | 14    | M 6 X 1                                                                                                                                                                                                                              | 7                                                                                   | 5         | 11    | 8                                                                                   | 15        | 11    |                                                                                     |            |
| 5/16" - 18                                                                                                 | 15                                                                                | 11                 | 24    | 17                                                                                | 33      | 25    | M 8 X 1.25                                                                                                                                                                                                                           | 17                                                                                  | 12        | 26    | 19                                                                                  | 36        | 27    |                                                                                     |            |
| 5/16" - 24                                                                                                 | 17                                                                                | 13                 | 26    | 19                                                                                | 37      | 27    | M 8 X 1                                                                                                                                                                                                                              | 18                                                                                  | 13        | 28    | 21                                                                                  | 39        | 29    |                                                                                     |            |
| 3/8" - 16                                                                                                  | 27                                                                                | 20                 | 42    | 31                                                                                | 59      | 44    | M10 X 1.5                                                                                                                                                                                                                            | 33                                                                                  | 24        | 52    | 39                                                                                  | 72        | 53    |                                                                                     |            |
| 3/8" - 24                                                                                                  | 31                                                                                | 22                 | 47    | 35                                                                                | 67      | 49    | M10 X 0.75                                                                                                                                                                                                                           | 39                                                                                  | 29        | 61    | 45                                                                                  | 85        | 62    |                                                                                     |            |
| 7/16" - 14                                                                                                 | 43                                                                                | 32                 | 67    | 49                                                                                | 95      | 70    | M12 X 1.75                                                                                                                                                                                                                           | 58                                                                                  | 42        | 91    | 67                                                                                  | 125       | 93    |                                                                                     |            |
| 7/16" - 20                                                                                                 | 49                                                                                | 36                 | 75    | 55                                                                                | 105     | 78    | M12 X 1.5                                                                                                                                                                                                                            | 60                                                                                  | 44        | 95    | 70                                                                                  | 130       | 97    |                                                                                     |            |
| 1/2" - 13                                                                                                  | 66                                                                                | 49                 | 105   | 76                                                                                | 145     | 105   | M12 X 1                                                                                                                                                                                                                              | 90                                                                                  | 66        | 105   | 77                                                                                  | 145       | 105   |                                                                                     |            |
| 1/2" - 20                                                                                                  | 75                                                                                | 55                 | 115   | 85                                                                                | 165     | 120   | M14 X 2                                                                                                                                                                                                                              | 92                                                                                  | 68        | 145   | 105                                                                                 | 200       | 150   |                                                                                     |            |
| 9/16" - 12                                                                                                 | 95                                                                                | 70                 | 150   | 110                                                                               | 210     | 155   | M14 X 1.5                                                                                                                                                                                                                            | 99                                                                                  | 73        | 155   | 115                                                                                 | 215       | 160   |                                                                                     |            |
| 9/16" - 18                                                                                                 | 105                                                                               | 79                 | 165   | 120                                                                               | 235     | 170   | M16 X 2                                                                                                                                                                                                                              | 145                                                                                 | 105       | 225   | 165                                                                                 | 315       | 230   |                                                                                     |            |
| 5/8" - 11                                                                                                  | 130                                                                               | 97                 | 205   | 150                                                                               | 285     | 210   | M16 X 1.5                                                                                                                                                                                                                            | 155                                                                                 | 115       | 240   | 180                                                                                 | 335       | 245   |                                                                                     |            |
| 5/8" - 18                                                                                                  | 150                                                                               | 110                | 230   | 170                                                                               | 325     | 240   | M18 X 2.5                                                                                                                                                                                                                            | 195                                                                                 | 145       | 310   | 230                                                                                 | 405       | 300   |                                                                                     |            |
| 3/4" - 10                                                                                                  | 235                                                                               | 170                | 360   | 265                                                                               | 510     | 375   | M18 X 1.5                                                                                                                                                                                                                            | 220                                                                                 | 165       | 350   | 260                                                                                 | 485       | 355   |                                                                                     |            |
| 3/4" - 16                                                                                                  | 260                                                                               | 190                | 405   | 295                                                                               | 570     | 420   | M20 X 2.5                                                                                                                                                                                                                            | 280                                                                                 | 205       | 440   | 325                                                                                 | 610       | 450   |                                                                                     |            |
| 7/8" - 9                                                                                                   | 225                                                                               | 165                | 585   | 430                                                                               | 820     | 605   | M20 X 1.5                                                                                                                                                                                                                            | 310                                                                                 | 230       | 650   | 480                                                                                 | 900       | 665   |                                                                                     |            |
| 7/8" - 14                                                                                                  | 250                                                                               | 185                | 640   | 475                                                                               | 905     | 670   | M24 X 3                                                                                                                                                                                                                              | 480                                                                                 | 355       | 760   | 560                                                                                 | 1050      | 780   |                                                                                     |            |
| 1" - 8                                                                                                     | 340                                                                               | 250                | 875   | 645                                                                               | 1230    | 910   | M24 X 2                                                                                                                                                                                                                              | 525                                                                                 | 390       | 830   | 610                                                                                 | 1150      | 845   |                                                                                     |            |
| 1" - 12                                                                                                    | 370                                                                               | 275                | 955   | 705                                                                               | 1350    | 995   | M30 X 3.5                                                                                                                                                                                                                            | 960                                                                                 | 705       | 1510  | 1120                                                                                | 2100      | 1550  |                                                                                     |            |
| 1-1/8" - 7                                                                                                 | 480                                                                               | 355                | 1080  | 795                                                                               | 1750    | 1290  | M30 X 2                                                                                                                                                                                                                              | 1060                                                                                | 785       | 1680  | 1240                                                                                | 2320      | 1710  |                                                                                     |            |
| 1-1/8" - 12                                                                                                | 540                                                                               | 395                | 1210  | 890                                                                               | 1960    | 1440  | M36 X 3.5                                                                                                                                                                                                                            | 1730                                                                                | 1270      | 2650  | 1950                                                                                | 3660      | 2700  |                                                                                     |            |
| 1-1/4" - 7                                                                                                 | 680                                                                               | 500                | 1520  | 1120                                                                              | 2460    | 1820  | M36 X 2                                                                                                                                                                                                                              | 1880                                                                                | 1380      | 2960  | 2190                                                                                | 4100      | 3220  |                                                                                     |            |
| 1-1/4" - 12                                                                                                | 750                                                                               | 555                | 1680  | 1240                                                                              | 2730    | 2010  | <sup>1</sup> in-tpi = nominal thread diameter in inches-threads per inch<br><sup>2</sup> N · m = newton-meters<br><sup>3</sup> ft-lb= foot pounds<br><sup>4</sup> mm x pitch = nominal thread diameter in millimeters x thread pitch |                                                                                     |           |       |                                                                                     |           |       |                                                                                     |            |
| 1-3/8" - 6                                                                                                 | 890                                                                               | 655                | 1990  | 1470                                                                              | 3230    | 2380  |                                                                                                                                                                                                                                      |                                                                                     |           |       |                                                                                     |           |       |                                                                                     |            |
| 1-3/8" - 12                                                                                                | 1010                                                                              | 745                | 2270  | 1670                                                                              | 3680    | 2710  |                                                                                                                                                                                                                                      |                                                                                     |           |       |                                                                                     |           |       |                                                                                     |            |
| 1-1/2" - 6                                                                                                 | 1180                                                                              | 870                | 2640  | 1950                                                                              | 4290    | 3160  |                                                                                                                                                                                                                                      |                                                                                     |           |       |                                                                                     |           |       |                                                                                     |            |
| 1-1/2" - 12                                                                                                | 1330                                                                              | 980                | 2970  | 2190                                                                              | 4820    | 3560  |                                                                                                                                                                                                                                      |                                                                                     |           |       |                                                                                     |           |       |                                                                                     |            |
| Torque tolerance + 0%, -15% of torquing values. Unless otherwise specified use torque values listed above. |                                                                                   |                    |       |                                                                                   |         |       |                                                                                                                                                                                                                                      |                                                                                     |           |       |                                                                                     |           |       |                                                                                     |            |





## Warranty

**Land Pride** warrants to the original purchaser that this Land Pride product will be free from defects in material and workmanship beginning on the date of purchase by the end user according to the following schedule when used as intended and under normal service and conditions for personal use.

**Overall Unit:** One year Parts and Labor

**Scarifier Shanks, Skid Shoes & Grader Blades:** Considered wear items.

This Warranty is limited to the repair or replacement of any defective part by Land Pride and the installation by the dealer of any such replacement part, and does not cover common wear items. Land Pride reserves the right to inspect any equipment or parts which are claimed to have been defective in material or workmanship.

This Warranty does not apply to any part or product which in Land Pride's judgment shall have been misused or damaged by accident or lack of normal maintenance or care, or which has been repaired or altered in a way which adversely affects its performance or reliability, or which has been used for a purpose for which the product is not designed. Misuse also specifically includes failure to properly maintain oil levels, grease points, and driveline shafts.

Claims under this Warranty should be made to the dealer which originally sold the product and all warranty adjustments must be made through an authorized Land Pride dealer. Land Pride reserves the right to make changes in materials or design of the product at any time without notice.

This Warranty shall not be interpreted to render Land Pride liable for damages of any kind, direct, consequential, or contingent to property. Furthermore, Land Pride shall not be liable for damages resulting from any cause beyond its reasonable control. This Warranty does not extend to loss of crops, any expense or loss for labor, supplies, rental machinery or for any other reason.

**No other warranty of any kind whatsoever, express or implied, is made with respect to this sale; and all implied warranties of merchantability and fitness for a particular purpose which exceed the obligations set forth in this written warranty are hereby disclaimed and excluded from this sale.**

This Warranty is not valid unless registered with Land Pride within 30 days from the date of purchase.

**IMPORTANT:** The Online Warranty Registration should be completed by the dealer at the time of purchase. This information is necessary to provide you with quality customer service.

Model Number \_\_\_\_\_

Serial Number \_\_\_\_\_



Corporate Office: P.O. Box 5060  
Salina, Kansas 67402-5060 USA  
[www.landpride.com](http://www.landpride.com)

---