

# How to use the Gecko Gauge:

**IMPORTANT:** Nail first siding course at desired height before using the Gecko Gauge. No need for further layout.



**1** At approximately one-third of your siding's overall length from either end, place the Gecko's blade under bottom edge of siding and slide upward.



**2** Engage the handle for a snug fit. **Don't over-tighten!** (See photos A & B)



**3** Lower next siding piece into the gauge slots.



**4** Nail siding per manufacturer's recommendations. Remove both gauges and repeat steps 1 through 4 as you work upward to top of wall.


**Don't over-tighten handle!**



**CORRECT**



**A**

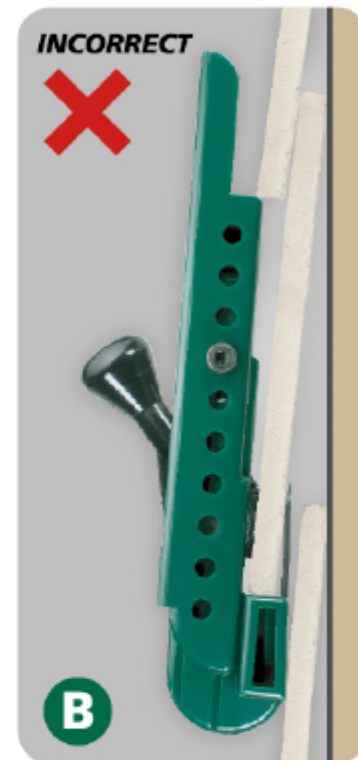

**INCORRECT**



**B**

**NOTE:** Over-tightening handle may cause tool to pull away from siding. As the rubber pad naturally wears over time, the handle can be engaged further for continued use.



**Questions? Comments? Contact us at:**

✉ [info@generaltools.com](mailto:info@generaltools.com) ☎ 800.697.8665 🌐 [www.generaltools.com/pactool](http://www.generaltools.com/pactool)

**PACTOOL**  
INTERNATIONAL

