


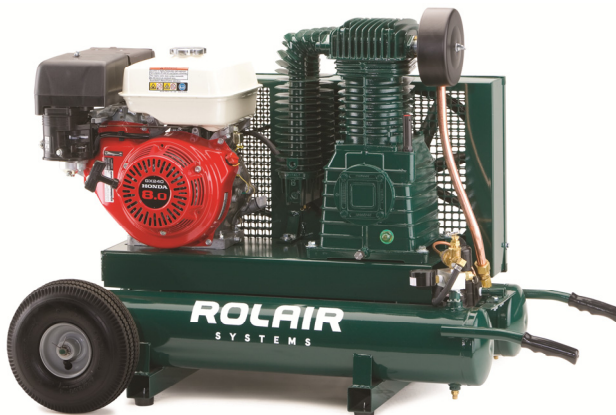

ROLAIR® STANDARD FEATURES

PUMP: Two Stage, Enbloc Cast-Iron Cylinders, Ball Bearings, Splash Lubricated, Automotive-Style Bearing Inserts on Connecting Rods, Swedish Lamellar Reed Valves, Cast-Iron Valve Plates, Oil Sight Gauge and Intercooler.

ENGINE: 270 cc (GX270) Honda 4-Cycle, Complete Aluminum-Alloy with Cast-Iron Sleeve, Over-head Valves, Retractable Starter, On/Off Switch, Splash Lubricated, Low-Oil Shutdown

TANK ASSEMBLY: Non-Code, 9 Gallons
I-Beam Saddle Construction

WHEELS: Two 410/350 x 4
2-Ply Fully-Pneumatic with Sealant

PERFORMANCE @ 90 PSI:

Cu. Ft. Displaced - 24.4

Cu. Ft. Delivered - 20.1

DIMENSIONS:

L46" x W28" x H35"

APPROXIMATE SHIPPING WEIGHT:

286 lb.

STANDARD EQUIPMENT

- Automatic Pilot Valve Operation
- Industrial Flexible Discharge Hose
- Automatic Engine Idle Control for Fuel Economy and Long Service Life
- Accessory Support Bracket
- Engine Oil Drain Port in Saddle
- Pressure Gauge 0-300 in 5 lb. Graduations
- Schmidt Belt-Tightening Device
- Safety Relief Valve
- Totally-Enclosed Steel Belt Guard
- Universal Quick-Disconnect Fitting

OPTIONAL EQUIPMENT

Filter-Regulator-Lubricator Sets, Electric Start (Honda and Kohler),
20 Gallon ASME Tank, Kohler and Robin Engines, Battery Tray