


Shipping dimensions in cub.yd

BVP 10/36	0.192	0.328
BVP 18/45	0.195	0.333

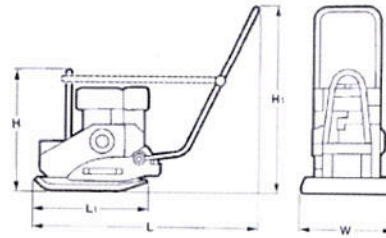

Standard Equipment

- ☒ Vibration insulated steering bow, foldable
- ☒ Detachable steering handle
- ☒ Highly wear resistant base plate
- ☒ Automatic shutdown at low oil level
- ☒ Recoil starter
- ☒ Single point lifting device
- ☒ Fully protected V-belt
- ☒ Carrying handles
- ☒ 3-2-1 Warranty

Dimensions in in

	H	H1	L	L1	W
BVP 10/36	21.1	36.0	43.9	22.0	14.2
BVP 18/45	21.1	36.0	43.9	22.0	17.7

Optional Equipment

- ☐ Sprinkler system (+22lb)
- ☐ Transport wheels (+8.8lb)
- ☐ Plastic mat
- ☐ Tool kit
- ☐ Service Kit
- ☐ TOUGH WARRANTY
- ☐ Comfort guide handle

Technical Data

		BOMAG BVP 10/36	BOMAG BVP 18/45
Weights			
Operating weight CECE	lb	183	201
Basic weight	lb	181	198
Dimensions			
Working width	in	14.2	17.7
Driving Characteristics			
Working speed, max.	ft/min	82.0	82.0
Max. gradeability (dep. on soil con.)	%	30	30
Drive			
Engine manufacturer		Honda	Honda
Type		GX 120	GX 160
Emission stage		CARB Phase III	CARB Phase III
Cooling		air	air
Number of cylinders		1	1
Performance SAE J 1349	hp	3.5	4.8
Speed	min-1	3,600	3,600
Drive system		mech.	mech.
Fuel		gasoline	gasoline
Fuel consump. aver. during operation	gal/h	0.2	0.3
Exciter system			
Frequency	vpm	5,400	5,400
Centrifugal force	lb	2,248	4,047
Amplitude	in	0.035	0.049
Capacities			
Fuel	gal	0.5	0.8
Water	gal	1.8	1.8

Technical modifications reserved. Machines may be shown with options.



PRUS 634 12 010

190916 Sa

BOMAG Americas, Inc.
125 Blue Granite Parkway
Ridgeway, SC 29130
USA
Tel. +1 803 3370700
Fax +1 803 3370800
www.bomag.com/us

