
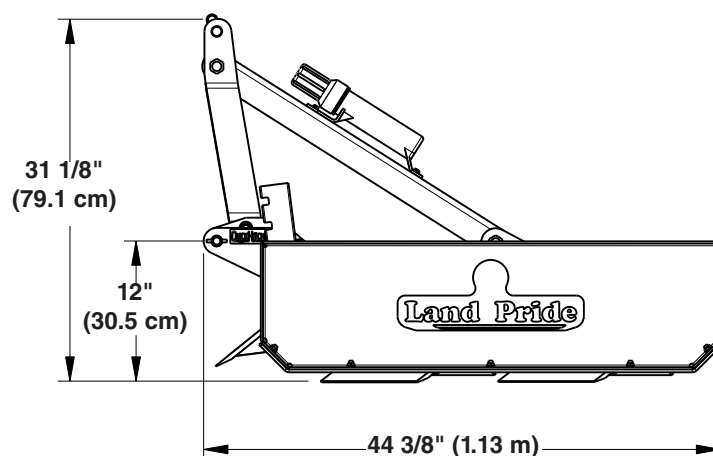


GS05 Series

List	Specifications & Capacities	
Model Numbers	GS0548	GS0560
Working width	48" (1.22 m)	60" (1.52 m)
Overall width	51 3/8" (1.30 m)	63 3/8" (1.61 m)
Number of scarifier shanks	4	
Tractor hp requirement	18-33 hp (13.4-24.6 kw)	
Weight without optional rear blades	310 lbs (140.6 kg)	350 lbs (158.8 kg)
Weight of optional rear blades	57 lbs (25.9 kg)	70 lbs (31.8 kg)
Overall length	44 3/8" (112.7 cm)	
Overall height	31 1/8" (79.1 cm)	
Side panel thickness	3/16" (5 mm) thick with 1 1/2" (3.8 cm) formed edges.	
Front main beam & scarifier support.	4"x 3" (10.2 cm x 7.6 cm) reinforced heavy wall tubing.	
Rear beam construction	3"x 2" (7.6 cm x 5.1 cm) heavy wall tubing.	
Skid Shoe Dimensions	1/4" (6 mm) Thick x 1 1/2" (3.8 cm) wide x 40" (1.02 m) long.	
Scarifier shank construction	Heat treated, 3-position shank with dimpled-on hardened tips.	
Grader blades	Two 3/8" x 6" (1.0 cm x 15.2 cm) high-carbon, heat-treated blades that are reversible and replaceable.	
Shank adjustments	3 3/4" and 1 1/2" (9.5 cm and 3.8 cm) below grade level. 1/2" (13 mm) above grade level.	
Lower 3-point attachment	Clevis type	
Hitch type	Category 1 and Category 1 Quick Hitch	
Color selections	Land Pride Beige or Orange	

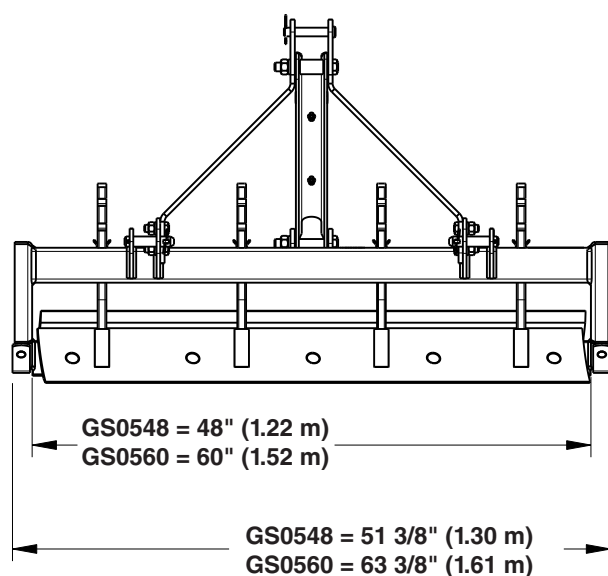

39859