


MODELS 4090HK17 / 4090HK17/20

163 cc (GX160) SINGLE-STAGE TWO-CYLINDER
PORTABLE GAS COMPRESSORS



MODEL 4090HK17

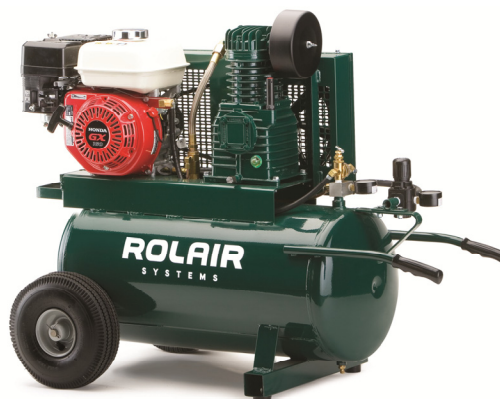

MODEL 4090HK17/20

ROLAIR® STANDARD FEATURES

PUMP: ROLAIR® Quality, Heavy Duty, Single Stage, Ball Bearings, Cast-Iron Twin-Cylinders, Hardened-Steel Valve Plates with Swedish Lamellar Reed Valves, Aluminum-Alloy Connecting Rods with Automotive-Style Inserts, Multi-Finned 11" Flywheel, Oil Sight Gauge and Splash Lubrication.

ENGINE: 163 cc (GX160) Honda 4-Cycle, Complete Die-Cast Aluminum-Alloy with Cast-Iron Sleeve, Overhead Valves, Retractable Starter, On/Off Switch, Splash Lubricated, Low-Oil Shutdown

TANK ASSEMBLY: Non-Code, 9 Gallons
(optional 20-Gallon Tank)

WHEELS: One 410/350 x 4
2-Ply Fully-Pneumatic with Sealant
(4090HK17/20 uses two wheels)

PERFORMANCE @ 90 PSI:

Cu. Ft. Displaced - 13.1

Cu. Ft. Delivered - 9.3

DIMENSIONS:

L46" x W19" x H28" - 4090HK17

L47" x W22" x H34" - 4090HK17/20

APPROXIMATE SHIPPING WEIGHT:

174 lb.—4090HK17

198 lb.—4090HK17/20

STANDARD EQUIPMENT

- Automatic Pilot Valve Operation
- Industrial Flexible Discharge Hose
- Automatic Engine Idle Control for Fuel Economy and Long Service Life
- 110/135 PSI Operating Pressure
- Air-Cooled Aftercooler
- Pressure Gauge 0-200 in 5 lb. Graduations
- Intake Filter with Silencer and Replaceable Element
- Schmidt Belt-Tightening Device
- Safety Relief Valve
- Totally-Enclosed Steel Belt Guard
- Accessory Support Bracket

OPTIONAL EQUIPMENT

Filter-Regulator-Lubricator Sets, Robin Engines



606 South Lake Street > P.O. Box 346 > Hustisford, WI 53034-0346 > **920.349.3281** > fax 920.349.3691 > www.rolair.com

